



---

# UPSilon 2000

---

**Uninterruptible Power Supply Software**

**User's Manual**

*For*

*MS-Windows 98*

*MS-Windows NT*

*MS-Windows 2000*

*MS-Windows Me*

*MS-Windows XP*

*MS-Windows 2003*

*MS-Windows Vista*

*Novell NetWare, Linux, FreeBSD*

# **COPYRIGHT ANNOUNCEMENT**

---

## ***LIMITED WARRANTY***

THE PROGRAM AND ENCLOSED MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANT ABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO QUALITY AND PERFORMANCE OF THE PROGRAM AND ENCLOSED MATERIAL IS ASSUMED BY YOU.

## ***LIMITATION OF REMEDIES***

Mega System Technologies Incorporation entire liability and your exclusion remedy shall be replacement of the media if you have met the conditions as described under "Limited Warranty."

In no event will Mega System Technologies Incorporation be liable to you for any other damages arising out of your use of this program.

All mentioned trademarks are registered trademarks of their respective owners.

## ***TECHNICAL SUPPORT***

UPSilon 2000 is developed by Mega System Technologies, Inc. If there is any question or comment about this product, please feel free to contact us.

Mega System Technologies, Inc.

Tel: +886-2-87922060

Fax: +886-2-87922066

E-MAIL: [service@megatec.com.tw](mailto:service@megatec.com.tw)

FTP: <ftp://ftp.megatec.com.tw>

WWW: <http://www.megatec.com.tw>

Copyright 1999-2007 by: Mega System Technologies, Inc.

## **SIMPLE INSTALLATION    Windows 98,NT,2000,Me,XP,2003,Vista**

---

- ◆ Hardware Installation (see p2)
  1. Connect UPSilon 2000 cable to UPS communication port.
  2. Connect UPSilon 2000 cable to RS-232 port of PC.
  3. USB solution is optional offer. Whenever use USB interface, only MegaTec specific USB cable useable. Contact our service center for details.
  
- ◆ Software Installation (see p4)
  1. Insert UPSilon 2000 CD to the CD-ROM, UPSilon 2000 will display the installation menu, or your can select **'run'** from windows start menu and execute **'setup.exe'**. UPSilon 2000 files will be copied into the directory you appointed. When UPSilon been lunched, the operating system will select the local language in UPSilon for displaying. If there is no preferred language in UPSilon, it will use English interface instead.  
(Default:C:\Program Files\Megatec\UPSilon 2000\)
  2. After installation. For Windows 95/98, check if there is a **'Rupsmon Daemon'** icon in task bar. For Windows NT, go to 'control panel->service' and check if 'Rupsmon' service has started
  3. Click **'UPSilon 2000 for Windows'** for parameter settings.
  4. Click **'Select UPS'** to monitor local or remote UPS.
  5. Click **'Settings'** to set **'Communication Type'** and **'Select Comm Port'**. If **'Communication with UPS'** on the main screen, this means you have connected with UPS.

*---For More Parameters, Please Reference Other Topics---*

- ◆ Hardware Installation(see p2)
  - 1.Connect male connector of UPSilon 2000 cable to UPS communication port .
  - 2.Connect female connector of UPSilon 2000 cable to RS-232 communication port of system. If there is only a 25 pin RS-232 connector, you can use the 9 pin to 25-pin adapter to convert it
- ◆ Software Installation (see p27)
  - 1.Login the file server as a SUPERVISOR or a user with access rights in sub-directory SYS: SYSTEM.  
**F:\>LOGIN SUPERVISOR**
  - 2.Put the UPSilon CD in CD ROM.
  - 3.Execute INSTALL.EXE in CD ROM.  
**A:\>INSTALL**
  - 4.After installation, please shutdown NetWare operating system and restart again. The system will load the UPSilon.NLM and execute it.
  - 5.When UPSilon for NetWare has been loaded, server screen shows the successful loading message. You could switch to the UPSilon with key ALT+ESC.
  - 6.After installation, if **“Connect”** is showed at **“Comm. Status”**, it means you have connection with UPS.
  - 7.If you have more than one com port on your File Server, please insert two or more **“LOAD AIOCOMX”** command in the system AUTOEXEC.NCF file after UPSilon 2000 installation.

*---For More Parameters, Please Reference Other Topics.---*

◆ **Hardware Installation** (see p2)

1. Connect the DB-9 male connector of the cable to the UPS interface.  
(A DB-9 female connector of RS232 protocol type.).
2. Connect the female connector of DB-9 cable to the dedicated RS232 serial port (If there is only a DB-25 connector on your computer, uses a DB-9 to DB-25 converter).

◆ **Software Installation** (see p47)

1. Log in as the super-user.
2. Insert UPSilon CD in CD-ROM Driver.
  - (1) Mount the UPSilon CD into Unix file directory '/cdrom'. For instance, in Linux, type:  

```
# mount -t iso9660 /dev/hdd /mnt/cdrom
```

  
(Please use device name of your system. Reference Appendix B for more information.)
  - (2) Copy the files in directory '/cdrom' into '/tmp'  

```
# cp /cdrom/unix/* /tmp
```
3. Execute the installation program:  

```
# cd /tmp  
# chmod 555 install  
# ./install
```
4. Select the target system from the menu, and configuration the UPSilon (make sure no other process uses the same serial port), the installation program will launch the UPSilon daemon process automatically.

Note: If the UPSilon has been installed in the FreeBSD v4.x by the 'UPSilon bsd-3.Z,' please install the "unix/patch/FreeBSD\_4.x/compat3.x/install.sh" of the setup CD. For even higher version, please update the system with 'compat3.x' from the WEB site).

*---For More Parameters, Please Reference Other Topics---*

# CONTENTS

---

<b>1.</b>	<b>Introduction .....</b>	<b>1</b>
1.1.	Packing including.....	2
1.2.	System requirements .....	2
<b>2.</b>	<b>Hardware Installation.....</b>	<b>3</b>
<b>3.</b>	<b>UPSilon 2000 for Windows .....</b>	<b>4</b>
3.1.	Features.....	4
3.2.	Software Installation .....	5
3.3.	Start-up and Uninstall UPSilon 2000 .....	6
3.3.1.	Start-up UPSilon 2000 .....	6
3.3.2.	Uninstall UPSilon 2000.....	6
3.4.	Functions .....	8
3.4.1.	UPS dynamic display area.....	8
3.4.2.	UPS Status Area.....	9
3.4.3.	Function selection area.....	9
<b>4.</b>	<b>UPSilon 2000 for NetWare.....</b>	<b>28</b>
4.1.	Features.....	28
4.2.	Software Installation .....	29
4.2.1.	Software Installation Procedure.....	29
4.2.2.	File Descriptions .....	30
4.3.	Main Screen Description .....	31
4.3.1.	Schedule Display Area .....	31
4.3.2.	Bar chart display area.....	32
4.3.3.	UPS Status Display Area.....	33
4.4.	Main Menu Functions.....	35
4.4.1.	Configuration.....	35
4.4.2.	Configure E-mail .....	39
4.4.3.	Configure Pager .....	40
4.4.4.	Schedule Shutdown.....	40
4.4.5.	Setup SNMP .....	42
4.4.6.	Shutdown UPS.....	43
4.4.7.	Test Until Batt_Low.....	43

4.4.8.	UPS 10Sec Test .....	43
4.4.9.	UPS Auto Test .....	44
4.4.10.	View History File .....	44
4.4.11.	View Log File .....	44
4.5.	Broadcast Messages .....	45
4.6.	Shutdown Procedure.....	46
<b>5.</b>	<b>UPSilon 2000 for Linux, FreeBSD.....</b>	<b>47</b>
5.1.	Features.....	47
5.2.	Software Installation .....	49
5.3.	Configuration .....	51
5.3.1.	Configure UPSilon for Linux, FreeBSD .....	51
5.3.2.	Communication Port .....	55
5.3.3.	Community Name and IP Address Configuration	57
5.3.4.	Event Notice by Email .....	57
5.3.5.	Event Notice by Pager.....	58
5.3.6.	Shutdown Batch Job.....	59
5.3.7.	Shutdown Command File .....	59
5.4.	Using UPSilon for Linux, FreeBSD.....	60
5.4.1.	Using the "upsilon" program .....	60
5.4.2.	Uninstall UPSilon for Linux, FreeBSD.....	62
5.5.	Monitor the UPS Status .....	63
5.6.	Control your UPS .....	66
5.7.	History Information.....	69
5.8.	Files List and CD Contents.....	70
5.9.	Instruction to mount CD-ROM .....	70
5.10.	System Parameters.....	70
5.11.	UPSilon FAQ .....	71

## 1. Introduction

UPSilon 2000 is a smart UPS monitoring and controlling software. UPSilon displays the status of UPS (e.g. input & output voltage, line frequency, load, temperature and battery capacity) in digital and graphic, which can help the users monitor the quality of power supply. Simultaneously, the users can remotely monitor UPS via network and manage the power more effectively. On AC failure or UPS battery low, UPSilon 2000 will perform its monitoring function without people around. UPSilon 2000 has some new ways to send the warning messages, auto dialing and by E-mail. In addition, UPSilon 2000 has a new Windows NT service function, which allows the monitoring program to be executed automatically before log in. UPSilon is available in many languages, you can select the one that is most familiar for you to carry out the software configuration and operation. Today the Internet is widely used, not only for PC but also for Server, coming into the times of receiving and sending information 24 hours a day. The power management without people has been a necessary function of UPS. UPSilon 2000, with full functions will be the best partner of your smart UPS.

## 1.1. Packing including

- ◆ One UPSilon 2000 software CD
- ◆ One UPSilon 2000 cable,
- ◆ UPSilon 2000 user's manual (For standard version)

## 1.2. System requirements

UPSilon 2000 hardware and software requirements as follows:

- ◆ Computer system RS232 communication port: COM1 ~ COM4 or USB port.
- ◆ Match True RS-232 communication UPS.
- ◆ Microsoft Windows 98
- ◆ Microsoft Windows NT v4.0
- ◆ Microsoft Windows 2000
- ◆ Microsoft Windows Me
- ◆ Microsoft Windows XP
- ◆ Microsoft Windows Vista
- ◆ Novell NetWare v3.1x,v4.x,v5.x,v6.x
- ◆ Linux
- ◆ FreeBSD

## 2. Hardware Installation

Please go by the following steps:

1. Connect male connector of UPSilon 2000 cable to UPS communication port.



PC



UPSilon 2000 CABLE



UPS

2. Connect the female connector of UPSilon 2000 cable to RS-232 communication port of system. If there is only a 25 pin RS-232 connector, you can use the 9 pin to 25-pin adapter to convert it.
3. COM Port Definition in NetWare:

	I/O Address	IRQ
COM1	3F8	4
COM2	2F8	3
COM3	3E8	4
COM4	2E8	3

### WARNING

- **In Novell NetWare printer setting (PSEVER.NLM), do not select the RS-232 port for UPS communication.**
- **UPSilon 2000 cable M2502 or M2505 is specially design, Do not use any other RS-232 CABLES to connect UPS.**
- **When select USB interface as communication port, only Windows 95/98/NT/2000/Me workable.**

## **3. UPSilon 2000 for Windows**

### **3.1. Features**

- ◆ Support Windows NT Service function.
- ◆ Support multiple shut down.
- ◆ Support multiple languages.
- ◆ Sending warning message by e-mail automatically.
- ◆ Calling pager for the warning message automatically.
- ◆ Remote monitoring UPS via TCP/IP or Internet.
- ◆ Detect AC fail and UPS battery low automatically.
- ◆ Scheduling turn on/off timing.
- ◆ Displaying the UPS status at graphic, such as the temperature, voltage, load, line frequency etc.
- ◆ Broadcasting warning message.
- ◆ Setting the countdown timing and the interval of each warning.
- ◆ Setting UPS diagnostic and self- test time.
- ◆ Before removing the system, automatically close and store the applicable programs.
- ◆ Recording and analyzing the UPS status.

## 3.2. Software Installation

The SETUP program is required for UPSilon installation. After installation, the files will be copied to the “MegaTec\UPSilon 2000” directory.

Following the steps below:

1. Turn on UPS and PC.
2. Place the UPSilon 2000 CD into CD ROM. UPSilon 2000 will display the installation menu, or you can select ‘**run**’ from windows start menu and execute ‘**setup.exe**’.
3. After installation, UPSilon 2000 files will be copied into the directory you appointed. When UPSilon been lunched, the operating system will select the local language in UPSilon for displaying. If there is no preferred language in UPSilon, it will use English interface instead.

**(Default:C:\Program Files\Megatec\UPSilon 2000\, When UPSilon executes, it will displays in the same language as the system. If cannot find the compatible language, English will be shown.)**

### 3.3. Start-up and Uninstall UPSilon 2000

#### 3.3.1. Start-up UPSilon 2000

After installation, please restart the computer. For Windows 95/98/Me, check if there is a '**Rupsmon Daemon**' icon in task bar. For Windows NT/2000/XP, go to 'control panel->service' and check if 'Rupsmon' service has started.



UPSilon 2000 is operating normal




UPSilon 2000 service is not operated  
or UPSilon 2000 cable is disconnected

If you want to change the function configuration, please run the UPSilon in the task bar directly or select "UPSilon for Windows" from "UPSilon" in program group of start menu in Windows.

#### 3.3.2. Uninstall UPSilon 2000


After installation, there is 6 selection as below under "UPSilon" in Windows start menu. If you want to remove the UPSilon from the system, please select "UPSilon Uninstall".

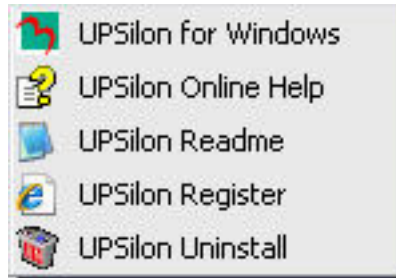

- ◆ UPSilon for Windows : Enter into UPSilon main function figure
- ◆ UPSilon OnLine Help : UPSilon introduction
- ◆ UPSilon Readme : UPSilon simple introduction
- ◆ UPSilon Uninstall : Remove UPSilon from Windows system
- ◆ UPSilon Register : UPSilon register form

### 3.4. Functions

After entering UPSilon, a functional chart displays as below.

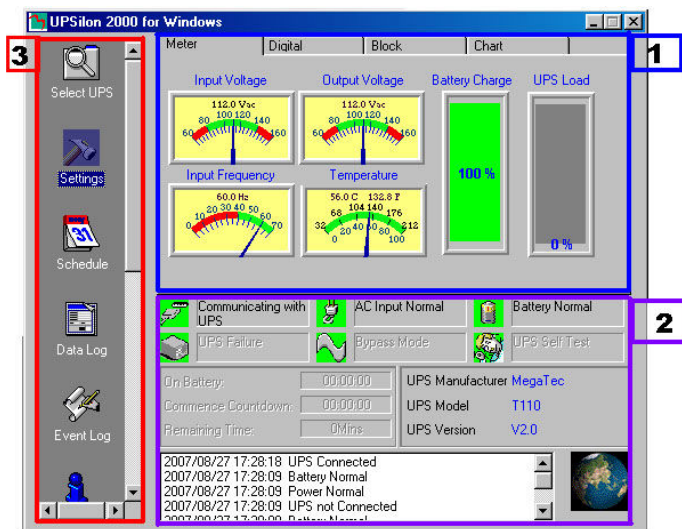

1. UPS dynamic display area (3.4.1)
2. UPS Status Area (3.4.2)
3. Function selection area (3.4.3)

#### 3.4.1. UPS dynamic display area

This area displays some relevant information of the UPS. Users could select different display mode, such as meter, digital, block and chart. The information includes input voltage, output voltage, line frequency, battery capacity, load, temperature etc.

### 3.4.2. UPS Status Area


After the UPSilon software installed, check whether the UPS is connected to the computer, AC power is in normal, status of UPS power supply and some relevant information of the UPS.

### 3.4.3. Function selection area

After a successful installation, you can start to configure the parameter value. Each parameter value will affect the normal operation of the UPSilon program. Please configure the parameter value of the different function options, according to the following chapter.

#### 3.4.3.1. Select UPS

Configure UPSilon: Monitor local UPS or Monitor remote UPS. The method: press "select UPS" for the selection. Shown as below.

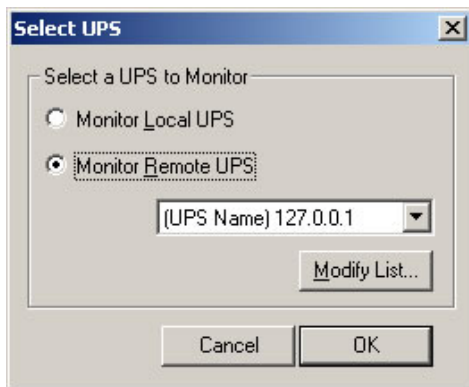

**◆ Monitor Local UPS**

Select monitor local UPS.


**◆ Monitor Remote UPS**

(1) Select monitor remote UPS.

(2) You can modify or insert the remote UPS data to the form and then exit.

(3) Select the UPS which you want to monitor and control in drop-down menu.

(4) Start to execute the function to monitor remote UPS.

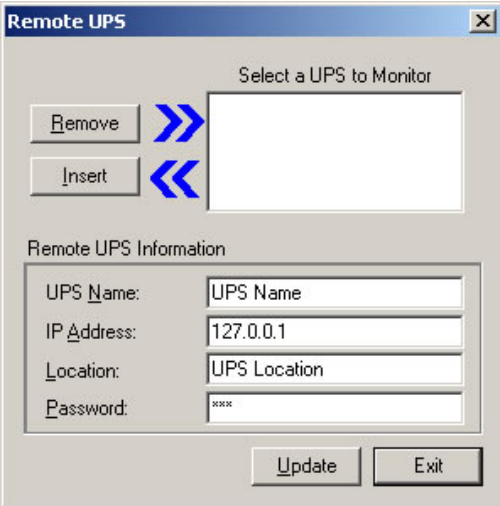

The screenshot shows a window titled "Remote UPS" with a close button (X) in the top right corner. The window is divided into several sections:

- Select a UPS to Monitor:** A large empty rectangular area for a drop-down menu. To its left are two buttons: "Remove" with a blue double-right arrow (»») and "Insert" with a blue double-left arrow (««).
- Remote UPS Information:** A section containing four input fields:
  - UPS Name: [UPS Name]
  - IP Address: [127.0.0.1]
  - Location: [UPS Location]
  - Password: [REXX]
- Buttons:** At the bottom right, there are two buttons: "Update" and "Exit".


### 3.4.3.2. Settings

After selecting a UPS, other parameters may be configured on the other Settings dialogue box tabs. If parameter values are incorrectly set UPSilon 2000 may have problems functioning properly.

Please click on icons listed below to get more information for its functions.

- ◆ General Settings : Defines location of UPS COM port ,communication protocol, and sets password for remote monitor enters.
- ◆ Computer Shutdown Sequence Settings : Set the functions you want to execute when UPSilon 2000 detects AC failure or UPS battery low.
- ◆ Broadcast Settings:Enable /disable braodcasting warning message when UPSilon 2000 detects AC failure or UPS battery low.
- ◆ Automatic Shutdown Time Parameters:Set the time for UPSilon 2000 to shutdown operating system and UPS when an AC failure or UPS battery low is detected.

UPSilon 2000 "Settings" windows :

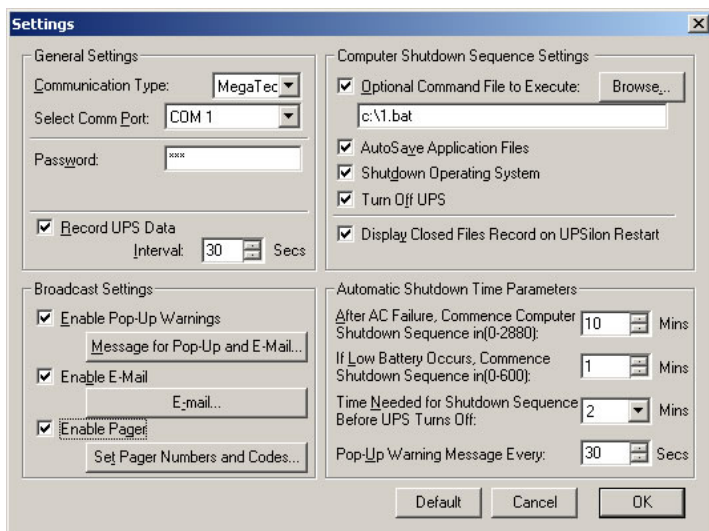

## A. General Settings

- ◆ Communication Type : MegaTec/Demo/Mega(USB) /SEC(2400bps) /SEC(9600bps)
- ◆ Select Comm Port: Configure communication port to connect with the UPSilon 2000 cable. (COM1-COM4).
- ◆ Password: Set the password of the remote connection of the UPSilon 2000. The connection would be successful only if the right password is provided. The password prevents the remote unconfirmed computer from connection.
- ◆ Record UPS Data : Set the record time interval about input & output voltage, line frequency, load, battery capacity and temperature.

## **B. Computer Shutdown Sequence Settings**

In this section, you can set the functions you want to execute when the UPSilon 2000 detects the signal for closing the computer.

- ◆ **Optional Command File to Execute:** Set the file name to be executed before the system shutdown. ( the full path and filename given.)

**Attention: If the program which you execute can not quit automatically, you would not be able to shutdown Windows and turn off UPS.**


- ◆ **Auto Save Application Files:** Configure auto saving all the opened applications and files before the system shut down. If not given filename, UPSilon will auto save in TMP(e.g. ~Wnnnn.TMP). Check the closed filename in "Close Files Record" in function menu.

**Attention: UPSilon will try to close general applications and store files by artificial intelligence mode, but UPSilon can not ensure that all the applicable software will be stored normally.**

- ◆ **Shut Down Operating System:** Set to shut down it's own operating system.
- ◆ **Turn Off UPS:** Set to turn off the UPS power supply.

**Attention: After shutting down system and turning off UPS, please do not cut the power supply. Otherwise, UPS and computer would fail to start automatically when AC power restores.**


- ◆ Display Closed Files Record on UPSilon Restart: Display the closed record on UPSilon restart if the auto saving function was set before closing the computer. Shown as below.

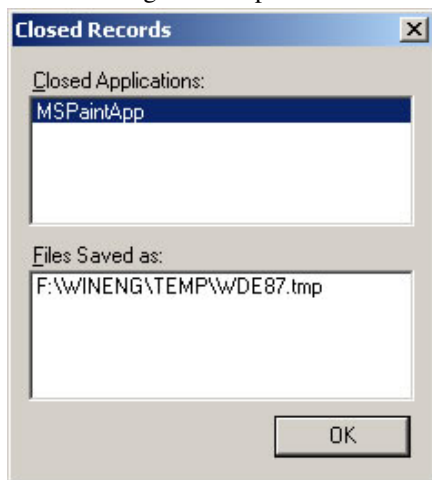


### C. Broadcast Settings

Enable /disable broadcasting warning message when UPSilon2000 detects AC failure or UPS battery low.

- ◆ Enable Pop-Up Warnings: The users can set whether or not appear the pop-up warning on the screen when the UPSilon 2000 detected AC power failure, UPS battery low or the signal of closing the computer. You can use the default message or you can set or modify the message on your own.

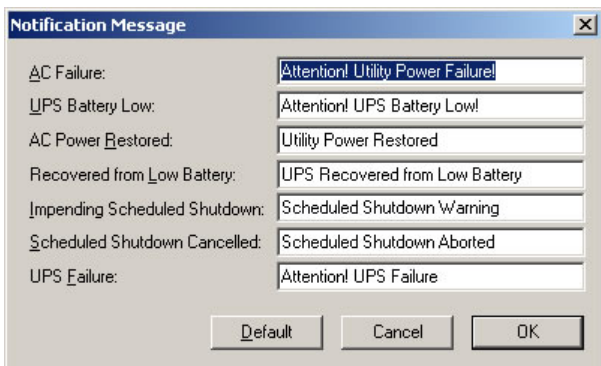

- ◆ Enable E-Mail: In this configuration, the messages could be sent to the administrator by e-mail. Shown as below.

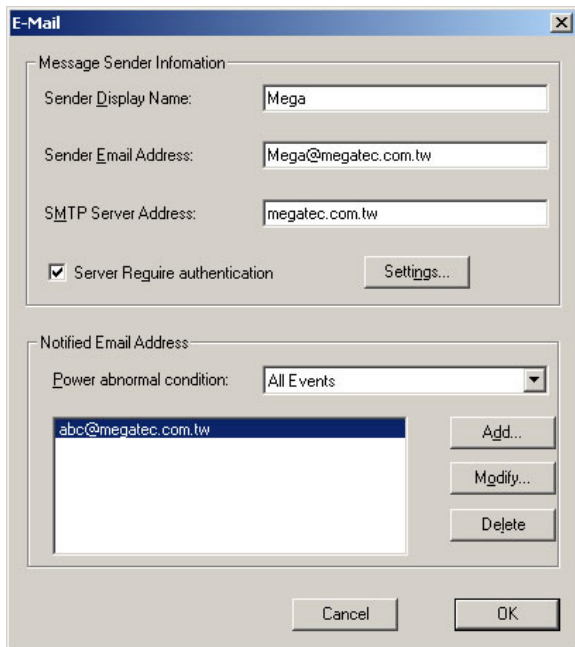


- Sender Display Name : Setting name for message "Sender".
- Sender Email Address : Setting the email address for sending message.
- SMTP Server Address : Set-up SMTP mail server address by IP or server-name.(e.g. 210.71.130.1 or megatec.com.tw)
- Server Require Authentication : Some Email Server required authentication by password, user can set the password here.




- Notified Email Address : Select the event item for sending first, and set the email address for receiving message. Press "OK" to save all the setting .E-mail may be sent in response to different events. More than one E-Mail address can be specified in the form of a list separated by commas. There is no limit on the number of mail recipients.
- Power abnormal condition : All Events/AC Failure/AC Power Restored/UPS Battery Low/Recovered from Low.
- Please Press "Add/Modify/Delete" button to edit email address.

- For sending all events to the same email account, select “All Events” and type the receiving email address.

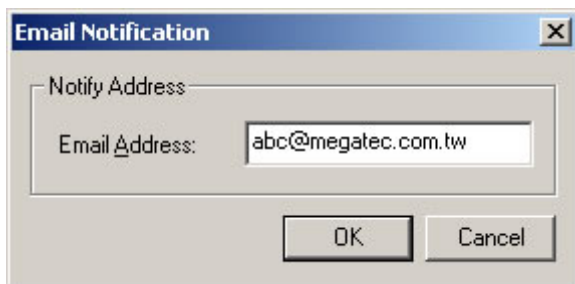

- Following picture is the email contents that sent automatically by “UPSilon 2000”:

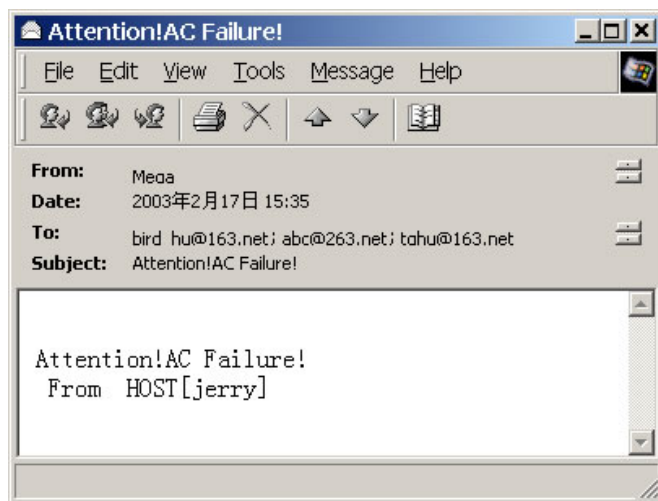

◆ Enable Pager:

In this function, the users can set the messages to the system administrator by pager. The configuration's mode and screen is as below.

Event	Pager Number	Code to Send
AC Failure:	0,,0947123451	#12340#
UPS Battery Low:	0,,0947123452	#12341#
AC Power Restored:	0,,0947123453	#12342#
Recovered from Low Battery:	0,,0947123454	#12343#
Impending Scheduled Shutdown:	0,,0947123455	#12344#
Scheduled Shutdown Cancelled:	0,,0947123456	#12345#
UPS Failure:	0,,0947123457	#12346#

Send Notification to the same pager number

Cancel OK

- Modem connected to: set the communication port, which connects with the Modem. The setting value is COM1-COM4.
- Event: As listed above.
- Pager number: Input the pager number . If necessary, please input the prefix code for outside line first , then add "," for 0.5 second delay time, the full pager numbers at last.
- Code to send: you can input the event code for sending.
- Send Notification to the same pager number : Select this check box to send all messages to the same pager and enter the relevant pager number in the AC Failure field.

**For instance:** Set the Modem connect to COM2 and dial “0” to access an outside line, and pager number is “0,947123456” and “#1234#” means AC power failed. (**Attention: The action should be done within 20 seconds from calling pager number to sending code transmission.**)

#### **D. Automatic Shutdown Time Parameters**

UPS allows the users some time to shut down system before the UPS battery is exhausted. The characteristic configuration of UPS makes it to be sure that system can be restarted and operated normally.

- ◆ After AC Failure, Commence Computer Shutdown Sequence in: Set the continuous time for system operation after AC power fails. Please refer to the UPS hardware manual or consult to the UPS supplier before your configuration.

.settings range:0~2880 mins

.default value:10 mins

- ◆ If Low Battery Occurs, Commence Shutdown Sequence in: Set some time for system's continuous operation when battery low. For the setting value, the smaller is the better.

.settings range:0 ~600 mins

.default value:1 mins

- ◆ Time Needed for Shutdown Sequence Before UPS Turn Off: Set time interval from Windows shutdown to UPS power supply turn-off. It should be considered whether the time is enough for archiving before the system shutdown. The time

for archiving would be different for the amount and the size of the opened files .

.settings range : 0.2 ~ 99 mins

.default value:2 mins


- ◆ Pop-Up Warning Message Every: Set the time interval of displaying the warning messages.

.settings range:10~600 secs

.default value:30 secs


### 3.4.3.3. Schedule

UPSilon can set the scheduled time for UPS turn on /off and self-test. Therefore, the system could be operated without the management from system supervisor. You can set what and how often the schedule execution is. The setting category and operating frequency are as below.

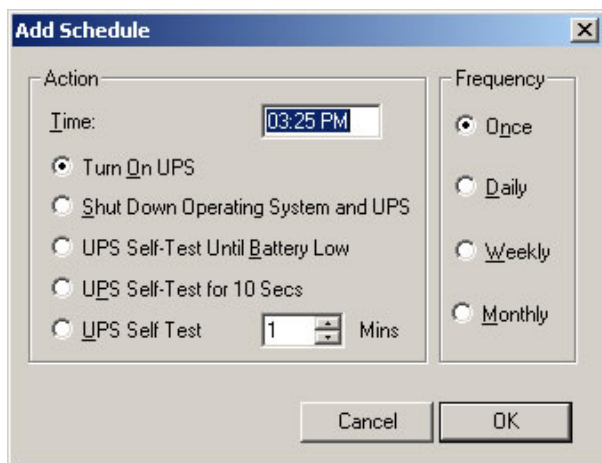

- ◆ Actions
  - .Turn on UPS
  - .Shutdown Operating System and UPS
  - .UPS Self-Test Until Battery Low
  - .UPS Self-Test for 10 Secs
  - .UPS Self-Test n mins
- ◆ Frequency
  - .Once
  - .Daily
  - .Weekly
  - .Monthly

Setting method: press "Schedule" in function menu. Select the date in the upper of left corner, then press the key "Add" for the "schedule Configuration". After the action and frequency's selection, press "OK" and back to the "Schedule" screen, then the new schedule could be seen in the record. If you want to set more records, repeat the above. After configuration, press "save" for archiving or select the item then press "remove" for taking out the record. Shown as below.

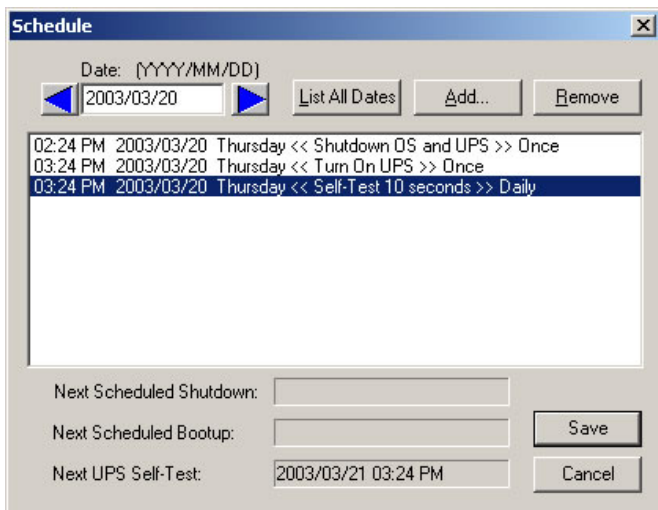

#### 3.4.3.4. Data Log

The UPS data could be recorded in this section, such as the input and output voltage, line frequency, load, battery capacity and temperature etc. The record interval could be altered in the area of "Automatic Shutdown Time Parameters" in "settings" of the function menu. In the section of "Data Log", press "Update" for data refreshing and press "Clear" for data deletion. The maximum number of data could be recorded in this file is 2000. Shown as below.

The Data Log window displays a table with the following columns: #, Time, Input..., Outp..., Input..., UPS Load, Batter..., and Temp... The data is as follows:

#	Time	Input...	Outp...	Input...	UPS Load	Batter...	Temp...
1	2003/03/20 03:...	217.2 v	0.0 v	50.0 Hz	0.0 %	0 %	24.0 C
2	2003/03/20 03:...	217.2 v	0.0 v	50.0 Hz	0.0 %	77 %	23.0 C
3	2003/03/20 03:...	217.2 v	0.0 v	50.0 Hz	0.0 %	76 %	24.0 C
4	2003/03/20 03:...	217.2 v	0.0 v	50.0 Hz	0.0 %	76 %	23.0 C
5	2003/03/20 03:...	217.2 v	0.0 v	49.9 Hz	0.0 %	77 %	23.0 C
6	2003/03/20 03:...	217.2 v	0.0 v	50.0 Hz	0.0 %	73 %	23.0 C
7	2003/03/20 03:...	217.2 v	222.8 v	50.0 Hz	0.0 %	84 %	23.0 C
8	2003/03/20 03:...	217.2 v	222.8 v	49.9 Hz	0.0 %	100 %	23.0 C
9	2003/03/20 03:...	217.2 v	222.8 v	49.9 Hz	0.0 %	100 %	23.0 C
10	2003/03/20 03:...	217.2 v	222.8 v	50.0 Hz	0.0 %	100 %	23.0 C
11	2003/03/20 03:...	217.2 v	222.8 v	50.0 Hz	0.0 %	100 %	23.0 C
12	2003/03/20 03:...	219.1 v	222.8 v	50.0 Hz	0.0 %	100 %	23.0 C

Buttons at the bottom: Print..., Update, Clear, Exit.

### 3.4.3.5. Event Log

You can check the date, time, and description of events in Event Log. The maximum number of data could be recorded in this file is 2000. Shown as below.

The Event Log window displays a table with the following columns: Date, Time, and Description. The data is as follows:


Date	Time	Description
2002/08/06	01:12:16 AM	UPS Self Test
2002/08/06	01:13:18 AM	UPS Self Test
2002/08/06	01:15:06 AM	AC Failure
2002/08/06	01:15:09 AM	Send E-Mail Successfully
2002/08/06	01:15:22 AM	AC Power Restored
2002/08/06	01:15:27 AM	Send E-Mail Successfully
2002/08/06	01:18:10 AM	UPS Self Test
2002/08/06	01:18:38 AM	AC Failure
2002/08/06	01:18:46 AM	Send E-Mail Successfully
2002/08/06	01:20:00 AM	AC Power Restored
2002/08/06	01:20:10 AM	Send E-Mail Successfully
2003/03/20	03:07:08 PM	UPS Self Test
2003/03/20	03:08:07 PM	UPS Self Test

Buttons at the bottom: Save as..., Print..., Clear, Exit.

### 3.4.3.6. History Calendar

In this section, you can check the monthly event, including AC fail, battery low, OS and UPS shutdown, UPS self-test etc.

Different color stands by different category. Press the block, the specific date will be displayed in the bottom of your right hand side. Press "PREV" for last month event record. Press "NEXT" for event record of the next month. Press the button "Exit" for quitting.

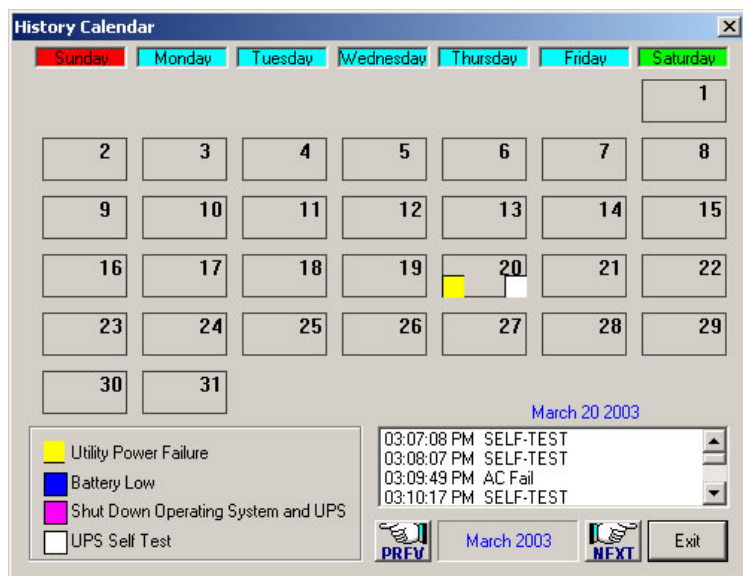

### 3.4.3.7. Control

Command UPS directly for the following test.


- ◆ UPS Self-Test for 10 Secs
- ◆ UPS Self-Test n Mins
- ◆ UPS Self-Test Until Battery Low
- ◆ Cancel UPS Self-Test
- ◆ UPS Beep On/Off (the UPS supports command "Q")
- ◆ Shut Down Operating System



### 3.4.3.8. Closed Files Record

In this section, you can check the closed applications and saved files. Method: select "Closed Files Record" in the function menu.

It only records the latest saved information. Shown as below.

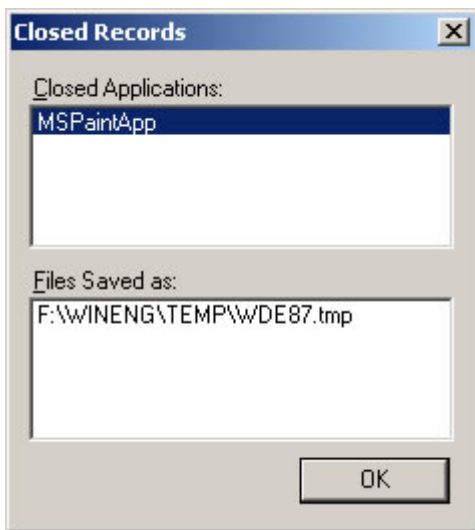

### 3.4.3.9. About UPSilon 2000

Clicking on "About" in the UPSilon 2000 main screen displays copyright and version information on UPSilon 2000.



### 3.4.3.10. Exit UPSilon 2000

Select "Exit UPSilon" in function menu to close the UPSilon. (UPSilon2000 will still execute the monitoring function in the background.)

## 4. UPSilon 2000 for NetWare

### 4.1. Features

- ◆ Auto sending warning messages by e-mail.
- ◆ Auto sending warning messages by pager.
- ◆ Auto detecting AC power failure and UPS battery low.
- ◆ Providing the UPS expected time setting of power supply.
- ◆ History data recording.
- ◆ Auto shutting down the system and turning off the UPS when AC power failed.
- ◆ Broadcasting the warning messages to all the workstations.
- ◆ Display the system shutdown countdown.
- ◆ Able to operate on server and workstation.
- ◆ Schedule on/off in a week
- ◆ Programmable UPS auto-testing period.
- ◆ UPS status reporting on server screen, including the input/output voltage, load, line frequency, temperature and so on.
- ◆ Local Network UPS monitoring through an Net Agent or SNMP Agent.

## 4.2. Software Installation

UPSilon for NetWare is a NetWare Loadable Module (NLM). The installation will copy files into: SYS: SYSTEM and modify the file AUTOEXEC.NCF. All these software installation procedures require the user is able to read and write files in sub-directory SYS: SYSTEM.

### 4.2.1. Software Installation Procedure

1. Login the file server as a SUPERVISOR or a user with access rights in sub-directory SYS: SYSTEM.


**F:\>LOGIN SUPERVISOR**

2. Put the UPSilon CD in CD ROM.
3. Execute INSTALL.EXE in CD ROM.

**A:\>INSTALL**

4. After installation, please shutdown NetWare operating system and restart again. The system will load the UPSilon.NLM and execute it.
5. When UPSilon for NetWare has been loaded, server screen shows the successful loading message. You could switch to the UPSilon with key ALT+ESC.
6. If you have more than one com port on your File Server, please insert two or more "LOAD AIOCOMX" command in the system AUTOEXEC.NCF file after UPSilon 2000 installation

After installation, the main screen of UPSilon for NetWare is as below.

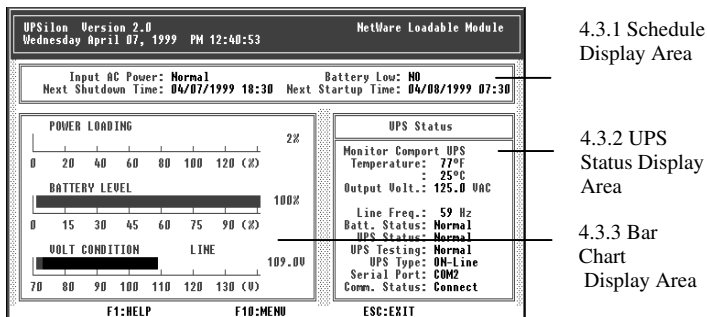

## 4.2.2. File Descriptions

### File Descriptions of UPSilon for NetWare

UPSilon.NLM	UPSilon for NetWare execution program
UPSilon.LOG	UPS status history file
UPSilon.SCH	Schedule ON/OFF time configuration file
UPSilon.PRN	UPS data analysis file, this file could be operated with LOTUS or EXCEL for UPS status analysis.
UPSilon.CFG	UPSilon for NetWare configuration file

Installation program will copy these files into the sub-directory of SYS: SYSTEM.

## 4.3. Main Screen Description

### 4.3.1. Schedule Display Area

Input AC Power: <b>Normal</b>	Battery Low: <b>NO</b>
Next Shutdown Time: <b>04/07/1999 18:30</b>	Next Startup Time: <b>04/08/1999 07:30</b>

#### ◆ Input AC Power

Status of AC power: when AC power failed, UPS will start to supply the power to system. UPSilon will broadcast the warning message of AC power failure to all the workstations. This will also show the system shutdown countdown. UPSilon will make all the workstations off-line if AC power has not restored in the setting time. After operating system has been shut down, the UPSilon will turn-off UPS and the system will be restarted when AC power restored.

#### ◆ The meanings of input AC Power are :

**.Normal : AC Power Normal**

**.Failed : AC Power Failed**

#### ◆ Battery Low

This shows whether the UPS battery is getting exhausted. When UPS battery power low, the UPS could supply system with power. The UPSilon will broadcast the battery low situation to all the workstations, and the system would be shut down in a minute.

#### ◆ The meanings of Battery Low are:

**.NO: UPS Battery Normal**

**.YES: UPS Battery Low**


◆ Next Shutdown Time

Next system shutdown time in the schedule setting.

◆ Next Startup Time

Next start time of system in the schedule setting.

### 4.3.2. Bar chart display area

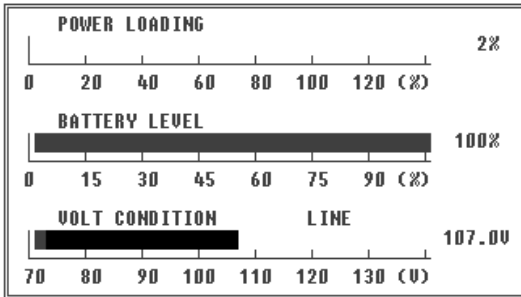

◆ POWER LOADING

Percentage of power loading. When loading is more than 90 percent, the bar will turn red to show the warning signal.

◆ BATTERY LEVEL

Percentage of UPS Battery power. When the battery power level drops below 20 percent. The bar will turn red to show the warning.

◆ VOLT CONDITION

Input voltage of AC Power

### 4.3.3. UPS Status Display Area

UPS Status	
Monitor Comport UPS	
Temperature:	80°F
	: 27°C
Output Volt.:	125.0 VAC
Line Freq.:	60 Hz
Batt. Status:	Normal
UPS Status:	Normal
UPS Testing:	Normal
UPS Type:	ON-Line
Serial Port:	COM2
Comm. Status:	Connect

- ◆ Temperature    the interior temperature of UPS
- ◆ Output Volt.    The output voltage of UPS
- ◆ Line Freq.     The line frequency of input voltage
- ◆ Batt. Status    UPS battery status

**.Normal : UPS Battery Normal**

**.Failed : The UPS Battery Failed, Please Examine and Repair.**

- ◆ UPS Status

**.Normal: Online UPS In a Normal Condition**

**.Batt. Mode: UPS supply the system with power.**

**.Bypass: AC power bypasses the system power directly.**

**.Boost: system power voltage is too low, UPS boosts the system power.**

◆ UPS Testing

This shows whether the UPS is doing the self-testing

**.Normal: UPS had done or did not do self-testing**

**.Testing: UPS self-testing**

◆ UPS Type

**.On-line: On-line Type UPS**

**.Off-line: Off-line Type UPS**

◆ Serial Port

Shows which communication port is used for UPS communication.

◆ Comm. Status


Show the status of UPS communication

**.Connect: System connects to UPS**

**.Disconnect: System did not connect to UPS**

## 4.4. Main Menu Functions

Press F10 in the main menu of UPSilon for NetWare and this will be shown on the screen as follows.

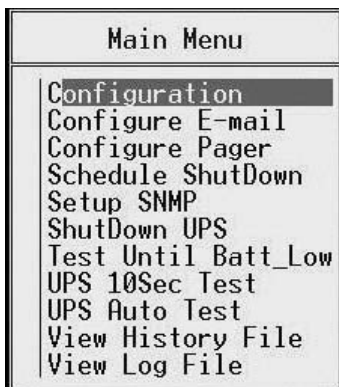

### 4.4.1. Configuration

Configuration		
Time Between AC Power Fail and initial warning message :	5	Sec
Delay of Shutdown Server when AC Power Failed :	2	Min
Delay Between Warning Message :	10	Sec
Delay of Shutdown Server when Battery Low :	1	Min
Duration of UPS Auto Testing :	10	Min
Communication Serial Port :	0	
Time of History Recording :	1	Min
Period of UPS Auto Testing :	2	Week
Battery Voltage Rating :	24	Volt
Enable Pager(y/n) :	n	
Enable E-mail(y/n) :	n	

◆ Time Between AC Power Fail and initial warning message

This option sets the delay time between AC power failure and initial warning message to all the workstations.

Sometimes, the AC line power has a surge or temporary unstable voltage input, and this setting will prevent this situation. Therefore, we set this delay time to make sure there is actually an AC power fail happened before we send out the warning message.

.settings range:5~32

.default value:10 seconds

◆ Delay of Shutdown Server when AC Power Failed

This option sets the delay time between AC power fail and server shutdown. When line power failed, the UPS will supply the system with power. The setting value should be smaller than the length of the time, which the UPS supply.

.setting range:2~999 minutes

.default value:10 minutes

**Attention: Please refer to the UPS power capacity in UPS user's manual for proper delay time setting for your system.**

◆ Delay Between Warning Message

When AC power failed, the file server will send warning messages to all the workstations. This option sets the duration between every warning message.

.setting range:5~30 seconds

.default value:20 seconds

◆ Delay of Shutdown Server when Battery Low

This option sets the delay time between UPS battery low and file server shutdown.

When AC power failed, the UPS will supply the power to your system from the UPS battery. But, if the UPS battery is in low capacity, discard what is the setting delay time between AC fail and file server shutdown, the system will shut down the file server in the delay time of this option. This will protect the file server from instant turn-off due to insufficient battery power.

.setting range:0~2 minutes

.default value:1 minute

◆ Duration of UPS Auto Testing

This option is for setting both functions below:

- 1.The battery discharge time of the UPS when doing the self-testing.
- 2.This is to set a period of time for executing “RUPSDOWN.NCF” before system shutdown. (See section P40/4.6 for details of these settings.)

.setting range:1~99 minutes

.default value:10 minutes

◆ Communication Serial Port

This option sets the communication port between UPS and file server (RS232 port).

This RS232 port could only be used by UPS, do not shared with other equipment.

.setting range:COM1~COM4

.default value:COM1

◆ Time of History Recording

This option sets the delay time between every system status record in the history file.

.setting range:0~120 minutes

.default value:1 minute

**Attention: System status recording will be turn-off when this option set as 0.**

◆ Period of UPS Auto Testing

The battery of UPS would not be last long if it is always in the ample state. Therefore, you should make the UPS testing itself and using the power of battery once in a while. That is exactly what the function of UPS auto testing is doing. This option sets the period of UPS auto testing.

.setting range:1~4 weeks

.default value:1 week

◆ Battery Voltage Rating

This option sets the reference voltage of the UPS battery. The UPSilon could calculate the battery capacity only if the accurate input of the battery voltage. This voltage setting is also the reference for showing UPS capacity. Most of the on-line UPS could provide this information for UPSilon and the users do not have to give the battery voltage setting here. If the status of battery capacity shows incorrect value or you are using off-line UPS, you have to give the voltage rating of

the UPS battery. Please refer to the manual of UPS for battery voltage rating.

◆ Enable Pager(y/n)

This option sets whether to send the warning messages to inform the administrator by pager.

◆ Enable E-mail(y/n)

This option sets whether to e-mail the warning messages to inform the administrator.

#### 4.4.2. Configure E-mail

You can configure to send the messages (i.e. AC power fail, UPS battery low or system shutdown signal) detected by UPSilon to inform the system administrator by e-mail. The setting mode and figure is as below.

- 1.Postoffice (server IP address): input the server IP address in digital (e.g. 210.71.130.1) and press <Enter> to save.
- 2.E-MAIL ADDRESS: input the e-mail address for receiving the event messages and you can send the messages to different stuff respectively. You should compart the addresses with comma and press <Enter> to save.

Email Configuration	
Postoffice (xxx.xxx.xxx.xxx): 127.0.0.1	
POWER EVENT	E-MAIL ADDRESS
AC FAIL	maintenance@negatec.com.tw
Battery Low	maintenance@negatec.com.tw
AC Power Recovered	maintenance@negatec.com.tw
Battery Low Recovered	maintenance@negatec.com.tw
Schedule Down	maintenance@negatec.com.tw
Schedule Down Cancelled	maintenance@negatec.com.tw

### 4.4.3. Configure Pager

You can configure to send the messages (i.e. AC power fail, UPS battery low or system shutdown signal) detected by UPSilon to the system administrator by pager. The setting mode and figure is as below.

1. Modem Connects to Communication Serial Port: configure which communication port connects to Modem. The setting value: 1 ~ 4
2. PAGER NUMBER: input the calling pager number. If necessary, please input the code for outside line first, then add “,” for 0.5 second delay time, the full pager numbers at last.
3. Code to send: you can input the sending code that stands for some event.

**For instance:** Set the Modem to connect to COM1 and dial “0” to access an outside line, and the pager number is “0,,0947123456” and “#1234#” means AC power failed.

Pager Configuration		
Communication Serial Port (0..4) : 1		
POWER EVENT	PAGER NUMBER	MESSAGE
AC FAIL	0,,0947123456	#1234#
Battery Low	0,,0947234567	#112233#
AC Power Recovered	0,,0943456789	#33221#
Battery Low Recovered	0,,0943987654	#959595#
Schedule Down	0,,0959654321	#19959#
Schedule Down Cancelled	0,,0959223344	#43213#

### 4.4.4. Schedule Shutdown

In this function, you can set the ON/OFF time of the file server every week. Before the scheduled shutdown, system will send

out the warning messages to inform users on the network and it would permit users to finish the process on the network. This warning message starts 5 minutes before scheduled shutdown and will be sent out every 1 minute.

The system will shut down file server and UPS at the scheduled shutdown time. The UPS will be in sleeping state and wake up according to the next scheduled turn-on time. The setting figure is as below.

Schedule ShutDown							
	Sun	Mon	Tue	Wed	Thu	Fri	Sat
S	█	09:00	08:30	09:00	07:30	08:00	08:30
D		18:00	17:30	18:30	17:30	17:00	12:30
S: Start-Up Time				Format: HH:MM			
D: Shut-Down Time				24-hour clock			

- ◆ S: Start-Up Time : system start-up time
- ◆ D: Shut-Down Time : system shut-down time
- ◆ Format : these inputs are in 24 hours format with HH: MM, **be ignored with a blank input.**

**For instance:** in the scheduled shutdown table shown in the above, the system will be turn-on 9:00 next Monday morning and be turn-off 6:00 at night. The system will be turn-on 8:30 Tuesday morning and be turn-off 5:30 in the afternoon (the rest may be deduced by analogy). The system will not be turn-on or turn-off on Sunday.


**Attention: Do not turn off the UPS power switch. That will make the UPS unable to wake up.**

#### 4.4.5. Setup SNMP

Choose this function to monitor UPS via Net Agent or SNMP Agent in Lan. The meaning of each field is as detailed below:

SNMP Configuration	
Use SNMP to Monitor the UPS?(y/n):	<input checked="" type="checkbox"/>
IP Address :	192.168.0.1
Community Name :	public
Allow UPS Shutdown?(y/n):	y

- ◆ Use SNMP to Monitor the UPS : Set this value to Monitor UPS via Net Agent or SNMP Agent.
- ◆ IP Address : Set Net Agent or SNMP Agent's IP
- ◆ Community Name : Set "public" or "private"
- ◆ Allow UPS Shutdown : Shutdown UPS when power event occurs.

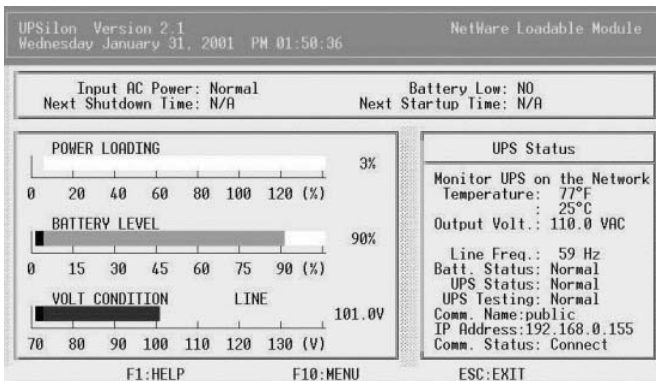

#### 4.4.6. Shutdown UPS

Shut down the file server and turn off UPS immediately.

If there is any users on the network with opening files, the system will show a warning message and ask for confirmation to shut down file server. If manager select “YES”, the system will enforce the user to disconnect from network, then shut down file server and UPS. The UPS will be in sleeping state and wake up according to the system configuration.

**Attention: Do not use the DOMN command in the “:” prompt. In that case, UPS will not be able to enter sleeping state and wake up automatically.**

#### 4.4.7. Test Until Batt\_Low

This function makes the UPS to do a self-testing of all functions. The testing will last until UPS battery exhausted.

Execution mode: press<Enter> in Main Menu for selecting “Test until Batt\_Low” and press “Esc” back to the main screen. This “Testing” will be shown in bar of “UPS Status”. In order to stop the test, please go back to “Main Menu”and select “Test until Batt\_Low” once again.

#### 4.4.8. UPS 10Sec Test

This function would make the UPS to do a short testing. This testing will last for 10 seconds.

Execution mode: press<Enter> in Main Menu for selecting “UPS 10Sec Test” and press”Esc” back to the main screen. This “Testing” will be shown in bar of “UPS Status”. In order to stop

the test, please go back to “Main Menu” and select “UPS 10Sec Test” once again.

#### 4.4.9. UPS Auto Test

This function will make the UPS to discharge the battery and to do the self-testing. The period of battery discharge is according to the setting in configuration menu.

#### 4.4.10. View History File

This function could review the records of system history files. It includes date, time, input/output voltage, line frequency, load, UPS battery capacity, temperature and so on.

DATE	TIME	AC_in	Out	Hz	Load	Batt	°F
"04/06/1999"	"15:01"	107.0	125.0	60	2	100	75
"04/06/1999"	"15:02"	107.0	123.0	60	2	100	75
"04/06/1999"	"15:03"	107.0	125.0	59	2	100	75
"04/06/1999"	"15:04"	107.0	125.0	60	2	100	75
"04/06/1999"	"15:05"	107.0	125.0	60	2	100	75
"04/06/1999"	"15:06"	107.0	123.0	59	2	100	77
"04/06/1999"	"15:07"	107.0	125.0	60	2	100	75
"04/06/1999"	"15:08"	107.0	125.0	60	2	100	75
"04/06/1999"	"15:09"	107.0	123.0	60	2	100	77
"04/06/1999"	"15:10"	107.0	125.0	60	2	100	77
"04/06/1999"	"15:11"	107.0	123.0	60	2	100	77
"04/06/1999"	"15:12"	107.0	123.0	60	2	100	77
"04/06/1999"	"15:13"	107.0	125.0	60	2	100	77

#### 4.4.11. View Log File

This function could review the records of system log files. It includes abnormal AC power, status of UPS and so on.

UPSilon LOG			
03/25/1999	22:16:49	*** UPSilon V2.0 ***	STARTED
03/26/1999	21:30:00	*** Shutdown File Server (Schedule) ***	
03/27/1999	00:42:34	*** UPSilon V2.0 ***	STARTED
03/27/1999	00:42:53	*** EXIT UPSilon ***	
03/27/1999	00:42:58	*** UPSilon V2.0 ***	STARTED
03/27/1999	00:46:16	*** EXIT UPSilon ***	
03/27/1999	01:00:47	*** UPSilon V2.0 ***	STARTED
03/27/1999	01:01:15	*** EXIT UPSilon ***	
03/29/1999	10:57:17	*** UPSilon V2.0 ***	STARTED
03/29/1999	10:57:26	*** EXIT UPSilon ***	
03/29/1999	11:51:33	*** UPSilon V2.0 ***	STARTED
03/29/1999	11:51:41	*** EXIT UPSilon ***	
03/29/1999	16:56:31	*** UPSilon V2.0 ***	STARTED

## 4.5. Broadcast Messages

When any power condition is detected, file server will broadcast messages to workstations. Here are the messages below:

**<WARNING> AC POWER FAIL, FS1 Shutdown in 10 min.**

UPSilon detects AC fail, start shutdown countdown.

---

**<Attention> FS1 will Shutdown in 1 minutes.**

Shut down warning of the last one minute.

---

**FS1 AC Power restored, Server won't be Shutdown.**

UPSilon detects AC power restored and the server won't be shut down.

---

**<Attention> UPS BATTERY LOW, FS1 Shut down in 1 min.**

UPSilon detects UPS battery low and the server will be shut down in one minute.

---

**Battery Low Recovered, Server won't be Shutdown.**

UPSilon detects UPS battery power low restored and the server won't be shut down.

---

**Battery Low Recovered, Server Shutdown in 2 min.**

UPS battery power low restored, but AC power still failed.

---

## 4.6. Shutdown Procedure

When an AC Failure or Battery Low occurs, or execute the “Scheduled ShutDown” or ”Shutdown UPS” function in “Main Menu”, UPSilon will execute shutdown procedures.

If you want to execute a command file before system shutdown, please create the file and save it as “RUPSDOWN.NCF” in SYS:SYSTEM. When execute shutdown procedures, UPSilon will execute “RUPSDOWN.NCF” first (if this file has been created). The time needed for executing “RUPSDOWN.NCF” can be set in “Duration of UPS Auto Testing” in “ Configuration”. (See P30 for details of these settings)

## 5. UPSilon 2000 for Linux, FreeBSD

### 5.1. Features

#### **Power Crisis Management**

- ◆ Utility Failure and Battery Low Detection
- ◆ Programmable System and UPS shutdown delay time
- ◆ Automatic system and UPS shutdown on power outages or before battery exhaustion
- ◆ Warning Messages sent to users at regular intervals prior to system shutdown
- ◆ Event Messages sent to manager by email or pager
- ◆ Unattended and scheduled system shutdown and automatic reboot
- ◆ User-defined batch job execution before system shutdown
- ◆ Power event notification for users and administrators

#### **UPS Management**

- ◆ UPS Preventive Maintenance - Initiate Self-tests to ensure the health of the UPS.
- ◆ UPS Battery Conservation – Put a network UPS on battery to sleep before the battery becomes depleted.
- ◆ Turn on, turn off, reboot or put the UPS to sleep straight from your console.

## **Power Management Utilities**

- ◆ Automatic installation procedure.
- ◆ Automatic background process initialization on startup
- ◆ Real-time graphical display of power/UPS status
- ◆ UPS power event logging
- ◆ Intuitive Parameter Configuration Editor
- ◆ Batch Job Execution before System Shutdown
- ◆ Simultaneous monitoring of several remote network UPSs
- ◆ Automatic Communication Port name detection
- ◆ Local monitoring through a cable attached to the system's RS232 serial port
- ◆ Local Network UPS monitoring through an SNMP agent (MIB OID {iso(1) org(3) dod(6) internet(1) private(4) enterprises(1) ppc(935)} )

## 5.2. Software Installation

1. Log in as the super-user.
2. Insert UPSilon CD in CD-ROM Driver.

(1)Mount the UPSilon CD into Unix file directory '/cdrom'. For instance, in Linux, type:

```
# mount -t iso9660 /dev/hdd /mnt/cdrom
```

(Please use device name of your system. Reference 5.9 for more information.)

(2)Copy the files in directory '/cdrom' into '/tmp'

```
# cp /cdrom/unix/* /tmp
```

3. Execute the installation program:

```
# cd /tmp
# chmod 555 install
# ./install
```

*The installation program will not execute in some shell scripts. If this happens, change to another shell script and try again.*

4. Select the target system from the menu.

Installation program will automatically copy files to the default location: "/etc/upsilon" and modify the system startup file to contain the UPSilon daemon process.

5. Press [enter]. The configuration set up screen appears. Follow instructions in *chapter 3* to configure UPSilon.

```
Installation of UPSilon 1.0 for UNIX
-----
1. IBM OS 2.x
2. IBM Solaris 2.x
3. IBM Solaris 2.6
4. HP HP-UX 11.x
5. DEC OS/1 3.x
6. DEC OS/2 4.x
7. IBM AIX 3.x
8. ISE UNIX 2.x
9. ISE UNIX 3.x
10. ISE UnixWare 2.x
11. Linux 2.x
12. Netware 3.x
13. Netware 386
14. Netware 486
15. ISE IRIX 6.x
16. FreeBSD 2.x
17. Fujitsu PC/98
17. MS-DOS
18. OS/2
19. OS/386
20. OS/386 2.x
21. OS/386 3.x
22. OS/386 4.x
23. OS/386 5.x
24. OS/386 6.x
25. OS/386 7.x
26. OS/386 8.x
27. OS/386 9.x
28. OS/386 10.x
29. OS/386 11.x
30. OS/386 12.x
31. OS/386 13.x
32. OS/386 14.x
33. OS/386 15.x
34. OS/386 16.x
35. OS/386 17.x
36. OS/386 18.x
37. OS/386 19.x
38. OS/386 20.x
39. OS/386 21.x
40. OS/386 22.x
41. OS/386 23.x
42. OS/386 24.x
43. OS/386 25.x
44. OS/386 26.x
45. OS/386 27.x
46. OS/386 28.x
47. OS/386 29.x
48. OS/386 30.x
49. OS/386 31.x
50. OS/386 32.x
51. OS/386 33.x
52. OS/386 34.x
53. OS/386 35.x
54. OS/386 36.x
55. OS/386 37.x
56. OS/386 38.x
57. OS/386 39.x
58. OS/386 40.x
59. OS/386 41.x
60. OS/386 42.x
61. OS/386 43.x
62. OS/386 44.x
63. OS/386 45.x
64. OS/386 46.x
65. OS/386 47.x
66. OS/386 48.x
67. OS/386 49.x
68. OS/386 50.x
69. OS/386 51.x
70. OS/386 52.x
71. OS/386 53.x
72. OS/386 54.x
73. OS/386 55.x
74. OS/386 56.x
75. OS/386 57.x
76. OS/386 58.x
77. OS/386 59.x
78. OS/386 60.x
79. OS/386 61.x
80. OS/386 62.x
81. OS/386 63.x
82. OS/386 64.x
83. OS/386 65.x
84. OS/386 66.x
85. OS/386 67.x
86. OS/386 68.x
87. OS/386 69.x
88. OS/386 70.x
89. OS/386 71.x
90. OS/386 72.x
91. OS/386 73.x
92. OS/386 74.x
93. OS/386 75.x
94. OS/386 76.x
95. OS/386 77.x
96. OS/386 78.x
97. OS/386 79.x
98. OS/386 80.x
99. OS/386 81.x
100. OS/386 82.x
101. OS/386 83.x
102. OS/386 84.x
103. OS/386 85.x
104. OS/386 86.x
105. OS/386 87.x
106. OS/386 88.x
107. OS/386 89.x
108. OS/386 90.x
109. OS/386 91.x
110. OS/386 92.x
111. OS/386 93.x
112. OS/386 94.x
113. OS/386 95.x
114. OS/386 96.x
115. OS/386 97.x
116. OS/386 98.x
117. OS/386 99.x
118. OS/386 100.x
119. OS/386 101.x
120. OS/386 102.x
121. OS/386 103.x
122. OS/386 104.x
123. OS/386 105.x
124. OS/386 106.x
125. OS/386 107.x
126. OS/386 108.x
127. OS/386 109.x
128. OS/386 110.x
129. OS/386 111.x
130. OS/386 112.x
131. OS/386 113.x
132. OS/386 114.x
133. OS/386 115.x
134. OS/386 116.x
135. OS/386 117.x
136. OS/386 118.x
137. OS/386 119.x
138. OS/386 120.x
139. OS/386 121.x
140. OS/386 122.x
141. OS/386 123.x
142. OS/386 124.x
143. OS/386 125.x
144. OS/386 126.x
145. OS/386 127.x
146. OS/386 128.x
147. OS/386 129.x
148. OS/386 130.x
149. OS/386 131.x
150. OS/386 132.x
151. OS/386 133.x
152. OS/386 134.x
153. OS/386 135.x
154. OS/386 136.x
155. OS/386 137.x
156. OS/386 138.x
157. OS/386 139.x
158. OS/386 140.x
159. OS/386 141.x
160. OS/386 142.x
161. OS/386 143.x
162. OS/386 144.x
163. OS/386 145.x
164. OS/386 146.x
165. OS/386 147.x
166. OS/386 148.x
167. OS/386 149.x
168. OS/386 150.x
169. OS/386 151.x
170. OS/386 152.x
171. OS/386 153.x
172. OS/386 154.x
173. OS/386 155.x
174. OS/386 156.x
175. OS/386 157.x
176. OS/386 158.x
177. OS/386 159.x
178. OS/386 160.x
179. OS/386 161.x
180. OS/386 162.x
181. OS/386 163.x
182. OS/386 164.x
183. OS/386 165.x
184. OS/386 166.x
185. OS/386 167.x
186. OS/386 168.x
187. OS/386 169.x
188. OS/386 170.x
189. OS/386 171.x
190. OS/386 172.x
191. OS/386 173.x
192. OS/386 174.x
193. OS/386 175.x
194. OS/386 176.x
195. OS/386 177.x
196. OS/386 178.x
197. OS/386 179.x
198. OS/386 180.x
199. OS/386 181.x
200. OS/386 182.x
201. OS/386 183.x
202. OS/386 184.x
203. OS/386 185.x
204. OS/386 186.x
205. OS/386 187.x
206. OS/386 188.x
207. OS/386 189.x
208. OS/386 190.x
209. OS/386 191.x
210. OS/386 192.x
211. OS/386 193.x
212. OS/386 194.x
213. OS/386 195.x
214. OS/386 196.x
215. OS/386 197.x
216. OS/386 198.x
217. OS/386 199.x
218. OS/386 200.x
219. OS/386 201.x
220. OS/386 202.x
221. OS/386 203.x
222. OS/386 204.x
223. OS/386 205.x
224. OS/386 206.x
225. OS/386 207.x
226. OS/386 208.x
227. OS/386 209.x
228. OS/386 210.x
229. OS/386 211.x
230. OS/386 212.x
231. OS/386 213.x
232. OS/386 214.x
233. OS/386 215.x
234. OS/386 216.x
235. OS/386 217.x
236. OS/386 218.x
237. OS/386 219.x
238. OS/386 220.x
239. OS/386 221.x
240. OS/386 222.x
241. OS/386 223.x
242. OS/386 224.x
243. OS/386 225.x
244. OS/386 226.x
245. OS/386 227.x
246. OS/386 228.x
247. OS/386 229.x
248. OS/386 230.x
249. OS/386 231.x
250. OS/386 232.x
251. OS/386 233.x
252. OS/386 234.x
253. OS/386 235.x
254. OS/386 236.x
255. OS/386 237.x
256. OS/386 238.x
257. OS/386 239.x
258. OS/386 240.x
259. OS/386 241.x
260. OS/386 242.x
261. OS/386 243.x
262. OS/386 244.x
263. OS/386 245.x
264. OS/386 246.x
265. OS/386 247.x
266. OS/386 248.x
267. OS/386 249.x
268. OS/386 250.x
269. OS/386 251.x
270. OS/386 252.x
271. OS/386 253.x
272. OS/386 254.x
273. OS/386 255.x
274. OS/386 256.x
275. OS/386 257.x
276. OS/386 258.x
277. OS/386 259.x
278. OS/386 260.x
279. OS/386 261.x
280. OS/386 262.x
281. OS/386 263.x
282. OS/386 264.x
283. OS/386 265.x
284. OS/386 266.x
285. OS/386 267.x
286. OS/386 268.x
287. OS/386 269.x
288. OS/386 270.x
289. OS/386 271.x
290. OS/386 272.x
291. OS/386 273.x
292. OS/386 274.x
293. OS/386 275.x
294. OS/386 276.x
295. OS/386 277.x
296. OS/386 278.x
297. OS/386 279.x
298. OS/386 280.x
299. OS/386 281.x
300. OS/386 282.x
301. OS/386 283.x
302. OS/386 284.x
303. OS/386 285.x
304. OS/386 286.x
305. OS/386 287.x
306. OS/386 288.x
307. OS/386 289.x
308. OS/386 290.x
309. OS/386 291.x
310. OS/386 292.x
311. OS/386 293.x
312. OS/386 294.x
313. OS/386 295.x
314. OS/386 296.x
315. OS/386 297.x
316. OS/386 298.x
317. OS/386 299.x
318. OS/386 300.x
319. OS/386 301.x
320. OS/386 302.x
321. OS/386 303.x
322. OS/386 304.x
323. OS/386 305.x
324. OS/386 306.x
325. OS/386 307.x
326. OS/386 308.x
327. OS/386 309.x
328. OS/386 310.x
329. OS/386 311.x
330. OS/386 312.x
331. OS/386 313.x
332. OS/386 314.x
333. OS/386 315.x
334. OS/386 316.x
335. OS/386 317.x
336. OS/386 318.x
337. OS/386 319.x
338. OS/386 320.x
339. OS/386 321.x
340. OS/386 322.x
341. OS/386 323.x
342. OS/386 324.x
343. OS/386 325.x
344. OS/386 326.x
345. OS/386 327.x
346. OS/386 328.x
347. OS/386 329.x
348. OS/386 330.x
349. OS/386 331.x
350. OS/386 332.x
351. OS/386 333.x
352. OS/386 334.x
353. OS/386 335.x
354. OS/386 336.x
355. OS/386 337.x
356. OS/386 338.x
357. OS/386 339.x
358. OS/386 340.x
359. OS/386 341.x
360. OS/386 342.x
361. OS/386 343.x
362. OS/386 344.x
363. OS/386 345.x
364. OS/386 346.x
365. OS/386 347.x
366. OS/386 348.x
367. OS/386 349.x
368. OS/386 350.x
369. OS/386 351.x
370. OS/386 352.x
371. OS/386 353.x
372. OS/386 354.x
373. OS/386 355.x
374. OS/386 356.x
375. OS/386 357.x
376. OS/386 358.x
377. OS/386 359.x
378. OS/386 360.x
379. OS/386 361.x
380. OS/386 362.x
381. OS/386 363.x
382. OS/386 364.x
383. OS/386 365.x
384. OS/386 366.x
385. OS/386 367.x
386. OS/386 368.x
387. OS/386 369.x
388. OS/386 370.x
389. OS/386 371.x
390. OS/386 372.x
391. OS/386 373.x
392. OS/386 374.x
393. OS/386 375.x
394. OS/386 376.x
395. OS/386 377.x
396. OS/386 378.x
397. OS/386 379.x
398. OS/386 380.x
399. OS/386 381.x
400. OS/386 382.x
401. OS/386 383.x
402. OS/386 384.x
403. OS/386 385.x
404. OS/386 386.x
405. OS/386 387.x
406. OS/386 388.x
407. OS/386 389.x
408. OS/386 390.x
409. OS/386 391.x
410. OS/386 392.x
411. OS/386 393.x
412. OS/386 394.x
413. OS/386 395.x
414. OS/386 396.x
415. OS/386 397.x
416. OS/386 398.x
417. OS/386 399.x
418. OS/386 400.x
419. OS/386 401.x
420. OS/386 402.x
421. OS/386 403.x
422. OS/386 404.x
423. OS/386 405.x
424. OS/386 406.x
425. OS/386 407.x
426. OS/386 408.x
427. OS/386 409.x
428. OS/386 410.x
429. OS/386 411.x
430. OS/386 412.x
431. OS/386 413.x
432. OS/386 414.x
433. OS/386 415.x
434. OS/386 416.x
435. OS/386 417.x
436. OS/386 418.x
437. OS/386 419.x
438. OS/386 420.x
439. OS/386 421.x
440. OS/386 422.x
441. OS/386 423.x
442. OS/386 424.x
443. OS/386 425.x
444. OS/386 426.x
445. OS/386 427.x
446. OS/386 428.x
447. OS/386 429.x
448. OS/386 430.x
449. OS/386 431.x
450. OS/386 432.x
451. OS/386 433.x
452. OS/386 434.x
453. OS/386 435.x
454. OS/386 436.x
455. OS/386 437.x
456. OS/386 438.x
457. OS/386 439.x
458. OS/386 440.x
459. OS/386 441.x
460. OS/386 442.x
461. OS/386 443.x
462. OS/386 444.x
463. OS/386 445.x
464. OS/386 446.x
465. OS/386 447.x
466. OS/386 448.x
467. OS/386 449.x
468. OS/386 450.x
469. OS/386 451.x
470. OS/386 452.x
471. OS/386 453.x
472. OS/386 454.x
473. OS/386 455.x
474. OS/386 456.x
475. OS/386 457.x
476. OS/386 458.x
477. OS/386 459.x
478. OS/386 460.x
479. OS/386 461.x
480. OS/386 462.x
481. OS/386 463.x
482. OS/386 464.x
483. OS/386 465.x
484. OS/386 466.x
485. OS/386 467.x
486. OS/386 468.x
487. OS/386 469.x
488. OS/386 470.x
489. OS/386 471.x
490. OS/386 472.x
491. OS/386 473.x
492. OS/386 474.x
493. OS/386 475.x
494. OS/386 476.x
495. OS/386 477.x
496. OS/386 478.x
497. OS/386 479.x
498. OS/386 480.x
499. OS/386 481.x
500. OS/386 482.x
501. OS/386 483.x
502. OS/386 484.x
503. OS/386 485.x
504. OS/386 486.x
505. OS/386 487.x
506. OS/386 488.x
507. OS/386 489.x
508. OS/386 490.x
509. OS/386 491.x
510. OS/386 492.x
511. OS/386 493.x
512. OS/386 494.x
513. OS/386 495.x
514. OS/386 496.x
515. OS/386 497.x
516. OS/386 498.x
517. OS/386 499.x
518. OS/386 500.x
519. OS/386 501.x
520. OS/386 502.x
521. OS/386 503.x
522. OS/386 504.x
523. OS/386 505.x
524. OS/386 506.x
525. OS/386 507.x
526. OS/386 508.x
527. OS/386 509.x
528. OS/386 510.x
529. OS/386 511.x
530. OS/386 512.x
531. OS/386 513.x
532. OS/386 514.x
533. OS/386 515.x
534. OS/386 516.x
535. OS/386 517.x
536. OS/386 518.x
537. OS/386 519.x
538. OS/386 520.x
539. OS/386 521.x
540. OS/386 522.x
541. OS/386 523.x
542. OS/386 524.x
543. OS/386 525.x
544. OS/386 526.x
545. OS/386 527.x
546. OS/386 528.x
547. OS/386 529.x
548. OS/386 530.x
549. OS/386 531.x
550. OS/386 532.x
551. OS/386 533.x
552. OS/386 534.x
553. OS/386 535.x
554. OS/386 536.x
555. OS/386 537.x
556. OS/386 538.x
557. OS/386 539.x
558. OS/386 540.x
559. OS/386 541.x
560. OS/386 542.x
561. OS/386 543.x
562. OS/386 544.x
563. OS/386 545.x
564. OS/386 546.x
565. OS/386 547.x
566. OS/386 548.x
567. OS/386 549.x
568. OS/386 550.x
569. OS/386 551.x
570. OS/386 552.x
571. OS/386 553.x
572. OS/386 554.x
573. OS/386 555.x
574. OS/386 556.x
575. OS/386 557.x
576. OS/386 558.x
577. OS/386 559.x
578. OS/386 560.x
579. OS/386 561.x
580. OS/386 562.x
581. OS/386 563.x
582. OS/386 564.x
583. OS/386 565.x
584. OS/386 566.x
585. OS/386 567.x
586. OS/386 568.x
587. OS/386 569.x
588. OS/386 570.x
589. OS/386 571.x
590. OS/386 572.x
591. OS/386 573.x
592. OS/386 574.x
593. OS/386 575.x
594. OS/386 576.x
595. OS/386 577.x
596. OS/386 578.x
597. OS/386 579.x
598. OS/386 580.x
599. OS/386 581.x
600. OS/386 582.x
601. OS/386 583.x
602. OS/386 584.x
603. OS/386 585.x
604. OS/386 586.x
605. OS/386 587.x
606. OS/386 588.x
607. OS/386 589.x
608. OS/386 590.x
609. OS/386 591.x
610. OS/386 592.x
611. OS/386 593.x
612. OS/386 594.x
613. OS/386 595.x
614. OS/386 596.x
615. OS/386 597.x
616. OS/386 598.x
617. OS/386 599.x
618. OS/386 600.x
619. OS/386 601.x
620. OS/386 602.x
621. OS/386 603.x
622. OS/386 604.x
623. OS/386 605.x
624. OS/386 606.x
625. OS/386 607.x
626. OS/386 608.x
627. OS/386 609.x
628. OS/386 610.x
629. OS/386 611.x
630. OS/386 612.x
631. OS/386 613.x
632. OS/386 614.x
633. OS/386 615.x
634. OS/386 616.x
635. OS/386 617.x
636. OS/386 618.x
637. OS/386 619.x
638. OS/386 620.x
639. OS/386 621.x
640. OS/386 622.x
641. OS/386 623.x
642. OS/386 624.x
643. OS/386 625.x
644. OS/386 626.x
645. OS/386 627.x
646. OS/386 628.x
647. OS/386 629.x
648. OS/386 630.x
649. OS/386 631.x
650. OS/386 632.x
651. OS/386 633.x
652. OS/386 634.x
653. OS/386 635.x
654. OS/386 636.x
655. OS/386 637.x
656. OS/386 638.x
657. OS/386 639.x
658. OS/386 640.x
659. OS/386 641.x
660. OS/386 642.x
661. OS/386 643.x
662. OS/386 644.x
663. OS/386 645.x
664. OS/386 646.x
665. OS/386 647.x
666. OS/386 648.x
667. OS/386 649.x
668. OS/386 650.x
669. OS/386 651.x
670. OS/386 652.x
671. OS/386 653.x
672. OS/386 654.x
673. OS/386 655.x
674. OS/386 656.x
675. OS/386 657.x
676. OS/386 658.x
677. OS/386 659.x
678. OS/386 660.x
679. OS/386 661.x
680. OS/386 662.x
681. OS/386 663.x
682. OS/386 664.x
683. OS/386 665.x
684. OS/386 666.x
685. OS/386 667.x
686. OS/386 668.x
687. OS/386 669.x
688. OS/386 670.x
689. OS/386 671.x
690. OS/386 672.x
691. OS/386 673.x
692. OS/386 674.x
693. OS/386 675.x
694. OS/386 676.x
695. OS/386 677.x
696. OS/386 678.x
697. OS/386 679.x
698. OS/386 680.x
699. OS/386 681.x
700. OS/386 682.x
701. OS/386 683.x
702. OS/386 684.x
703. OS/386 685.x
704. OS/386 686.x
705. OS/386 687.x
706. OS/386 688.x
707. OS/386 689.x
708. OS/386 690.x
709. OS/386 691.x
710. OS/386 692.x
711. OS/386 693.x
712. OS/386 694.x
713. OS/386 695.x
714. OS/386 696.x
715. OS/386 697.x
716. OS/386 698.x
717. OS/386 699.x
718. OS/386 700.x
719. OS/386 701.x
720. OS/386 702.x
721. OS/386 703.x
722. OS/386 704.x
723. OS/386 705.x
724. OS/386 706.x
725. OS/386 707.x
726. OS/386 708.x
727. OS/386 709.x
728. OS/386 710.x
729. OS/386 711.x
730. OS/386 712.x
731. OS/386 713.x
732. OS/386 714.x
733. OS/386 715.x
734. OS/386 716.x
735. OS/386 717.x
736. OS/386 718.x
737. OS/386 719.x
738. OS/386 720.x
739. OS/386 721.x
740. OS/386 722.x
741. OS/386 723.x
742. OS/386 724.x
743. OS/386 725.x
744. OS/386 726.x
745. OS/386 727.x
746. OS/386 728.x
747. OS/386 729.x
748. OS/386 730.x
749. OS/386 731.x
750. OS/386 732.x
751. OS/386 733.x
752. OS/386 734.x
753. OS/386 735.x
754. OS/386 736.x
755. OS/386 737.x
756. OS/386 738.x
757. OS/386 739.x
758. OS/386 740.x
759. OS/386 741.x
760. OS/386 742.x
761. OS/386 743.x
762. OS/386 744.x
763. OS/386 745.x
764. OS/386 746.x
765. OS/386 747.x
766. OS/386 748.x
767. OS/386 749.x
768. OS/386 750.x
769. OS/386 751.x
770. OS/386 752.x
771. OS/386 753.x
772. OS/386 754.x
773. OS/386 755.x
774. OS/386 756.x
775. OS/386 757.x
776. OS/386 758.x
777. OS/386 759.x
778. OS/386 760.x
779. OS/386 761.x
780. OS/386 762.x
781. OS/386 763.x
782. OS/386 764.x
783. OS/386 765.x
784. OS/386 766.x
785. OS/386 767.x
786. OS/386 768.x
787. OS/386 769.x
788. OS/386 770.x
789. OS/386 771.x
790. OS/386 772.x
791. OS/386 773.x
792
```

6. After configuration, press [q]. The installation program will launch the UPSilon daemon process automatically.

```
Installation completed!
Start UPSilon background process...
<UPSilon>
Copyright(C) 1998 Mega System Technologies, Inc.
Ver. 1.3
Start Running!
# =
```

If your system does not have a CD-ROM drive, you could use the 'ftp' utility in MS-DOS to copy files into the system directory '/tmp'. Follow the same procedure to install the software. If there is no network connection in your system, please let your dealer know what kind of media you could use to copy files into your system.

*Note: If the UPSilon has been installed in the FreeBSD v4.x by the 'UPSilon bsd-3.Z,' please install the "unix/patch/FreeBSD\_4.x/compat3.x/install.sh" of the setup CD. For even higher version, please update the system with 'compat3.x' from the WEB site).*

## 5.3. Configuration

### 5.3.1. Configure UPSilon for Linux, FreeBSD

Before using UPSilon, make sure the following items are all correct or appropriate:

1. Communication port name (chapter 5.3.2) *or*
2. IP Address and Community Name (chapter 5.3.3)
3. Shutdown delay time (chapter 5.3.3)
4. Event notice by Email (chapter 5.3.4)
5. Event notice by Pager (chapter 5.3.5)
6. System shutdown command (chapter 5.3.6)

UPSilon provides a full-screen editor for setting the parameters. The function key descriptions are at the bottom of the screen. You can type `‘/etc/upsilon/upsilon config’` at any time to configure UPSilon.

```
(UPSilon) UPS Configuration Utility, Ver. 1.3
Copyright(C) 1998 Mega System Technologies, Inc.          98-01-14, 17:02 Wed.
-----
[d] System Shutdown Delay Time When AC Power Failed: 5.0 Min.
[b] System Shutdown Delay Time When Battery Low       : 1.0 Min.
[a] UPS Turn OFF Delay Time                          : 3.0 Min.
[v] Battery Rating Voltage(if not provided by UPS) : --- Volt.
[c] Communication Port: /dev/tty1a

[n] Shutdown Count Down Display: ON
[l] Scheduling Function          : OFF
[a] Turn off UPS after System Shutdown: YES
[t] Time Scheduling(hh:mm)

          Sun.  Mon.  Tue.  Wed.  Thu.  Fri.  Sat.
Start-Up:  --:--  --:--  --:--  --:--  --:--  --:--  --:--
Shutdown:  --:--  --:--  --:--  --:--  --:--  --:--  --:--
[k] <<Change UPS Monitoring>> Monitor UPS from local serial port
[s] Save Configuration.
[q] Quit.
-----
Press the letters in brackets to select items.
Press [+], [-], or [i], [m] to change values.
Press [r] to redraw screen.
```

## ☛ Detailed Description of Each Option :

### [d] System Shutdown Delay Time When AC Power Failed:

This is the allotted time for

```
[d] System Shutdown Delay Time When AC Power Failed: 19.0 Hrs.
[th] System Shutdown Delay Time When Battery Low : 1.0 Min
```

users to save files and logout before the system shutdown when utility failure occurs. UPSilon will send periodic alerts to users to inform them about the impending system shutdown every minute based on this setting. When countdown ends, the system will be shut down. Maximum value is 24 hours, minimum value should not less than the battery low delay time.

### [b] System Shutdown Delay Time When Battery Low:

This is the delay time when a battery low condition occurs during power failure countdown. This is usually shorter than the utility failure delay time since the UPS battery is almost depleted. Minimum value is 1 minute, maximum value should not be greater than the delay time when AC power fails.


```
[d] System Shutdown Delay Time When AC Power Failed: 19.0 Hrs.
[b] System Shutdown Delay Time When Battery Low : 1.0 Min.
[u] UPS Turn Off Delay Time : 3.0 Min.
[th] Battery Rating Voltage(if not provided by UPS) : --- Volt
```

### [u] UPS Turn Off Delay Time:

This is delay time before the UPS stops providing output power. It has to be long enough to make sure the Unix system can be shut down completely. The turn off command is issued to the UPS at the same time when system begins the shutdown process. This delay time can be: 0.2, 0.3, ... 0.9, 1.0, 2.0, 3.0, ...10.0 minutes.

**[k] <<Change UPS Monitoring>>**

Set this value to *Monitor UPS from local serial port* if the UPS providing your computer's power is connected to your system's serial port.




```

shutdown.
[k] <<Change UPS Monitoring>> Monitor UPS from local serial port
[Esc] Save Configuration
  
```

See chapter 5.3.2 for more information.

Set this value to *Monitor local UPS SNMP agent* if the UPS providing your computer's power is connected to an SNMP agent on the network.



```

shutdown.
[k] <<Change UPS Monitoring>> Monitor local UPS SNMP agent
[Esc] Save Configuration
  
```

See Chapter 5.3.3 for more information

**[n] Shutdown Count Down Display:**

Set this value to ON if you want users to receive periodic alerts before system shutdown. Set this value to OFF if otherwise.

**[I] Scheduling Function:**

Set this value to ON if you want to schedule unattended system

```

[p] IP address : 200.70.07.249
[n] Shutdown Count Down Display: ON
[I] Scheduling Function : OFF
[a] Turn off UPS after System Shutdown: YES
[t] Time Scheduling(hh:mm)
  
```

shutdown and automatic reboot. Set this value to OFF if otherwise. Setting this value to OFF will also stop an impending scheduled system shutdown.

**[a] Turn off UPS after System Shutdown**

Set this value to YES if you want UPSilon to turn off the UPS after shutting down the system. Set this value to NO if you want the UPS to continue providing output power until its batteries get drained. UPSilon would not be able to reboot the system automatically if this value was set to NO.

**[t] Time Scheduling (hh:mm)**

Set various startup and shutdown times for every day for the week. UPSilon powers down and reboots the system based on this preset weekly schedule. When the scheduled time to shutdown approaches, UPSilon will send periodic alerts to inform users to save files, close jobs and log out of the system.

```
[E] Time Scheduling(hh:mm)
```

	Sun.	Mon.	Tue.	Wed.	Thu.	Fri.	Sat.
Start-Up:	04:00	04:00	06:00	14:00	14:00	21:00	18:00
Shutdown:	03:15	15:05	13:45	20:10	06:25	--:--	--:--

```
[E] <<Change UPS Monitoring>> Monitor Local UPS SNMP agent
```

**[s] Save Configuration.**

Saves all modified parameters.

**[q] Quit.**

Quit configuration without saving changes.

```
[K] <<Change UPS Monitoring>>
[s] Save Configuration.
[q] Quit.
-----
```

### 5.3.2. Communication Port

Set option [k] to *Monitor UPS from local serial port* if you intend to use UPSilon to monitor a UPS attached to your system's serial port.

```
-----
[k] <<Change UPS Monitoring>> Monitor UPS from local serial port
[c] Save Configuration
```

#### [c] Communication Port:

This is the device name of the serial port connected to the UPS. The default port name should be right for most systems. You can set this to any name that your system actually uses. Serial port names differ between each operating system. If you are not sure of the correct port name, please check your system documentation or refer to Appendix B for the correct serial port name.

UPSilon would try to auto-detect your Serial Port Name if you happen to enter a wrong one. If auto-detection fails then the message “*UPS Adapter No Response*” would appear.

```
[v] UPS Turn Off Delay Time : 0.0 min.
[v] Battery Rating Voltage(if not provided by UPS) : 60.0 Volt.
[c] Communication Port: /dev/tty1a
```

#### [v] Battery Rating Voltage (if not provided by UPS):

This option appears only when UPS monitoring is done through the system's serial port. Set this value only if your UPS does not provide this information. You could get this value from your UPS operation manual. This value will be used to calculate the battery level displayed on the status screen.



## ☛ Trouble Shoot the Communication Port

What to do when a "*UPS adapter no response*" message appears after running UPSilon. (Linux OS was used as an example). Please refer to the system documentation if you do not have the same Unix system as serial port setup procedures may vary from system to system.

1. Make sure no other process uses the same serial port.
2. Turn off function 'getty' of the serial port.

For Linux OS, check the file '/etc/ttytab' for the line below, and change "respawn" to "off":

**ttya:2345:respawn:/sbin/getty 9600 ttys0**

 Change this value to "off"       Com1

Execute this command if you modified the '/etc/ttytab' file. This will force an initial process that closes and re-opens the terminals.

**kill -1 1**

3. Change the file permission of '/dev/ttya'

**chmod 666 /dev/ttya**

### 5.3.3. Community Name and IP Address Configuration

Set option [k] to *Monitor local UPS SNMP agent* if you intend to use UPSilon to monitor a UPS attached to a local SNMP agent. The host computer (this computer's IP address) should have read-write access right to the SNMP agent.

```
Shutdown.
[k] <<Change UPS Monitoring>> Monitor local UPS SNMP agent
[el Save Configuration
```

#### [o] Community Name

The community name should correspond to a community known to the UPS SNMP agent.

#### [p] Ip Address

The target SNMP Agent IP address.

```
[o] Community Name : public
[p] Ip Address      : 203.73.69.244
[el Shutdown Count Down Display: ON
```

### 5.3.4. Event Notice by Email

UPSilon provides event notice functions. These functions enable you to know the newest power events by email or pager(chapter 5.3.5).

When power event occurs , UPSilon will sends necessary message to the email address(es) recorded in the file named

/etc/upsilon/upsilon.eml

This is a plain text file , adding any email address in a new line will enable UPSilon sending necessary message to it when power events occur .These power events include Utility Fail, Utility Recovery, Battery Low and Battery Recovery .

### 5.3.5. Event Notice by Pager

This function is likely to the function of 'Event Notice by Email' . When power event occurs , UPSilon will try to dial telephone or pager numbers according to the file named

`/etc/upsilon/upsilon.pgr`

This is also a plain text file , words in the first line denotes the pager port UPSilon will use when power event occurs , line(s) between the first and the second lines with a '~' mark leading to denote the pager number(s) UPSilon will dial when utility is fail , line(s) between the second and the third lines with a '~' mark leading to denote the pager number(s) UPSilon will dial when utility recover , line(s) between the third and the fourth lines with a '~' mark leading to denote the pager number(s) UPSilon will dial when battery capacity is about to deplete , line(s) below the fourth line with a '~' mark leading to denote the pager number(s) UPSilon will dial when battery capacity recover , so , the content of `upsilon.pgr` will looks like

```
/dev/ttyS0
~AC FAIL
0957608176,,,,#1331111#
~AC RECOVER
0957608176,,,,#1332222#
0931726768,,,,#1332222#
~BATTERY LOW
0957608176,,,,#1333333#
~BATTERY LOW RECOVER
0957608176,,,,#1334444#
```

### 5.3.6. Shutdown Batch Job

UPSilon provides a batch job function. This function enables you to execute some processes before system shutdown. The filename is:

`/etc/upsilon/preshut.bat`

This is a plain text file. Use any editor to add or modify commands in this file. Add comments by placing a leading '#' to the line.

### 5.3.7. Shutdown Command File

This file contains the command needed to shut down the system. The filename is:

`/etc/upsilon/shutdown.ini`

This file contains only one line of command. Please refer to your system's operation manual before making any modifications. **Be sure the command could actually shut down your system.**

## 5.4. Using UPSilon for Linux, FreeBSD

### 5.4.1. Using the "upsilon" program

After a successful installation, UPSilon will become a background process at system startup. It is not necessary to start the background process manually. UPSilon automatically detects and applies the modifications made in the configuration menu.

Use these commands to execute any of the six options provided in the `upsilon` program.

- Start the UPSilon daemon process:  
**`/etc/upsilon/upsilon start`**

```
#
# upsilon start
# <UPSilon>
# Copyright (C) 1998 Mega System Technologies, Inc.
# Ver. 1.3
# Start Running!
```

- Stop the UPSilon daemon process:  
**`/etc/upsilon/upsilon stop`**

- Configure the parameters:  
**`/etc/upsilon/upsilon config`**

(see 5.5.3)

- Monitor the UPS status:

**`/etc/upsilon/upsilon status`**

(see 5.5.5)

- Send Commands Directly to the UPS

**`/etc/upsilon/upsilon issuer`**

(see 5.5.6)

```
#
# upsilon stop
# Daemon Process Stops!
#
```

- Read Online Documentation

### **/etc/upsilon/upsilon help**

Help is just a few keystrokes away. Press the letters or numbers and follow the instructions at the bottom of the screen to reach a particular help topic.

```
(UPSilon) UPS ONLINE HELP, Ver. 1.3
Copyright(C) 1998 Mega System Technologies, Inc.          98-01-15, 17:18 Thu.
-----
1.) Introduction
2.) Installation
3.) Configuration
4.) Using UPSilon for UNIX
5.) Monitoring the UPS Status
6.) Control your UPS
7.) History Information
   a.) Appendix A - File List and Disk Contents
   b.) Appendix B - System Parameters
   c.) Appendix C - RUPS II FAQ
-----
Press the corresponding letters or numbers to know more about the
topics listed on your screen.
Press [q] to quit
```

In case you forgot any of the commands, just type “*upsilon*”. A short description of each program option would appear on the screen.

```
#
# upsilon
One argument needed!
Usage: upsilon [start|stop|config|status|issuer|help]

upsilon start - Start the Daemon process
upsilon stop - Terminate Resident Daemon process
upsilon config - Modify Time Settings
upsilon status - Monitor UPS status
upsilon issuer - Send Commands to the UPS
upsilon help - Display Online User Manual
#
```

## 5.4.2. Uninstall UPSilon for Linux, FreeBSD

Follow these steps to uninstall UPSilon.

1. Stop the UPSilon daemon process.  
(type “/etc/upsilon/upsilon stop”).
2. Remove the directory ‘/etc/upsilon’.
3. Remove the UPSilon startup process from the system.

*If your Operating System is:*

### **A. Linux**

Remove or mark the whole line containing this string in the file ‘/etc/rc.d/rc.local’:

*/etc/upsilon/upsilon start*

### **B. FreeBSD**

Remove or mark the whole line containing this string in the file ‘/etc/rc’:

*/etc/upsilon/upsilon start*

## 5.5. Monitor the UPS Status

The UPSilon Status screen provides a visual status-check of important operating data such as input/output voltage, current, battery capacity, power loading and much more. You could monitor your local UPS while simultaneously monitoring several network UPSs.

### ☞ To Monitor Your Local UPS

- Type “/etc/upsilon/upsilon status” to bring up the initial select screen. A short description and function key definitions appear at the bottom of the screen.
- Press <enter>. Upsilon Status checks the configuration settings

- This screen appears if you configured Upsilon to monitor the UPS from the local serial port. Function key descriptions are at the bottom right corner of the screen.
- This screen appears if you configured Upsilon to monitor the UPS through a local SNMP Agent.

```

[UPSilon] UPS Status Screen, Ver. 1.3
Copyright(C) 1999 Mega System Technologies, Inc. 99-02-04, 14:10 Wed.

*****
<<< [F] MONITOR REWOTE U P S >>>

<< Monitor a UPS which provides your computer's power >>
<< UPS may be connected to the NETWORK or to the SERIAL PORT >>
Press [enter]->Proceed. [F]->monitor Remote UPS. [G]->Exit
System: megasys(megasys)
  
```

```

[UPSilon] UPS Status Screen, Ver. 1.3
Copyright(C) 1999 Mega System Technologies, Inc. 99-01-16, 12:54 Fri.

UPS Type : On Line
UPS Rating Voltage: 240.0 Volt
UPS Rating Current: 50A
UPS Line Frequency: 60Hz
Communication Port: /dev/ttya
Input AC Power: Normal
Battery Status: Normal
UPS Functioning: Normal
Beep/Beak: Off
UPS Temperature: 25.0 C
UPS Self-Test : Stop
Count Down Function: Off
Scheduling Function: Off
Next Shutdown Time : ---
Next Reboot Time : ---
Default Shutdown Delay: 5.0 Min.
UPS Run-Off Delay : 3.0 Min.

System: megasys(megasys)
Type "F" to Redraw, Type "G" to Exit
  
```

```

[UPSilon] UPS Status Screen, Ver. 1.3
Copyright(C) 1999 Mega System Technologies, Inc. 99-02-03, 13:24 Thu.

IP Address: 202.72.69.244
Community Name: public
UPS Input Voltage: 100.0 Volt
UPS Output Voltage: 100.0 Volt
UPS Power Loading: 60
UPS Battery Level: 100
Time to Battery: 0 Sec.
Battery Voltage: 56.0 Volts
Input AC Power: Normal
Battery Status: Normal
Last Time: 0.0 Volts
Last Day: 0.0 Volts
Last Failure Cause: no transfer
UPS Self-Test : Stop
Next Shutdown Time: Sun, 00:00
Next Reboot Time: Sun, 01:10
Default Shutdown Delay: 5.0 Min.
UPS Run-Off Delay : 3.0 Min.

System: megasys(megasys)
[F]->Redraw, [G]->Exit
  
```





## 5.6. Control your UPS

UPSilon gives you the ability to shut down, restart, initiate self-tests and issue other commands to your local UPS. Just type “/etc/upsilon/upsilon issuer” to bring up the screens shown below. The screen displayed would depend on the UPSilon configuration.

### UPSilon configured to monitor the UPS from the serial port

```
(UPSilon) UPS COMMAND CENTER, Ver. 1.3
Copyright(C) 1998 Mega System Technologies, Inc.          98-01-15, 16:34 Thu.
-----
[ s ] 10 Seconds Test
[ b ] Test until Battery Low
[ t ] Test for a Specified Time Period
[ c ] Cancel Test Command

[ n ] Shut Down UPS
[ a ] Cancel Shut Down Command

[ r ] Redraw
[ q ] Quit
-----
Test for <n> minutes.
Duration of Self Test : 12 Minutes

Press [+] to increase,
[-] to decrease duration of Self Test

Press [p] to proceed, [Esc] to cancel
-----
```

#### Short Description of Each Option

- [s] 10 Seconds Test  
UPS performs a 10 seconds self test then returns to utility.
- [b] Test until Battery Low  
UPS performs self test until battery becomes low.
-

- **[t] Test for a Specified Time Period**

Specify the duration of Self-Test by using the [+] and [-] keys. UPS performs Self-Test according to this time setting.

- **[n] Shut Down UPS**

UPS stops providing output power after a few seconds.

- **[a] Cancel Shut Down Command**

Cancels an impending UPS shutdown or turns on the UPS if utility is present.

### ☛ UPSilon configured to monitor the UPS from an SNMP Agent

#### Short Description of Each Option

```
(UPSilon) UPS COMMAND CENTER, Ver. 1.3
Copyright(C) 1998 Mega System Technologies, Inc.          98-01-15, 16:21 Thu.
-----
[s] Shut Down UPS                [f] Flash and Beep
[c] Cancel Shut Down Command    [i] Test Indicators
[o] Turn On UPS

[u] Reboot UPS
[l] Put UPS to Sleep
[m] Simulate Power Fail
[b] Conserve Battery

[d] Diagnostic Self Test        [r] Redraw
[t] Test Run Time Calibration   [q] Quit
-----
Put UPS to sleep.
Duration of Sleep : 12 Minutes
Press [+] to increase,
Press [-] to decrease Sleep Time

UPS Status ( With Utility power.With output power.)
Press [p] to proceed, [Esc] to cancel
-----
```

- **[s] Shut Down UPS**

UPS stops providing output power after a few seconds.

- **[c] Cancel Shut Down Command**

Cancels an impending UPS shutdown.

- **[o] Turn On UPS**

Turns on the UPS if utility is present.

- **[u] Reboot UPS**

UPS shuts off then turns back on.

- **[l] Put UPS to Sleep**

Specify the duration of sleep using [+] and [-] keys. UPS will not provide output power while in sleep mode.

- **[m] Simulate Power Fail**

UPS switches to battery power.

- **[b] Conserve Battery**

UPS on battery goes to sleep mode.

- **[d] Diagnostic Self Test**

UPS performs a short diagnostic self test.

- **[t] Test Run Time Calibration**

The UPS discharges it's batteries until capacity is less than 25%

- **[f] Flash and Beep**

UPS lights all indicators and beeps.

- **[I] Test Indicators**

UPS performs a front panel lights test.

## 5.7. History Information

UPSilon records all power events in the file `/etc/upsilon/rupslog`. You could review this information to check if there was any occurrence of power failure.

Use any text editor to open the file `"/etc/upsilon/rupslog"`.

```
System will be shut down in 1316 Minutes! - Mon Jan 12 15:51:10 1998
System will be shut down in 1315 Minutes! - Mon Jan 12 15:52:10 1998
System will be shut down in 1314 Minutes! - Mon Jan 12 15:53:10 1998
System will be shut down in 1313 Minutes! - Mon Jan 12 15:54:10 1998
System will be shut down in 1312 Minutes! - Mon Jan 12 15:55:10 1998
System will be shut down in 1311 Minutes! - Mon Jan 12 15:56:10 1998
System will be shut down in 1310 Minutes! - Mon Jan 12 15:57:10 1998
UPS Battery low!! - Mon Jan 12 15:57:25 1998
System will be shut down in 1 Minute! - Mon Jan 12 15:57:26 1998
Preshut processes all done! - Mon Jan 12 15:58:26 1998
AC Power Fails! UPS provides power! - Mon Jan 12 16:08:07 1998
System will be shut down in 26 Minutes! - Mon Jan 12 16:08:09 1998
AC Power recovered! - Mon Jan 12 16:08:32 1998
Shutdown Stops! System Returns to Normal State! - Mon Jan 12 16:08:32 1998
Scheduled time to shutdown! - Mon Jan 12 16:11:23 1998
System will be shut down in 1 Minute! - Mon Jan 12 16:11:27 1998
Shutdown Stops! System Returns to Normal State! - Mon Jan 12 16:12:02 1998
Scheduled time to shutdown! - Mon Jan 12 16:14:54 1998
Preshut processes all done! - Mon Jan 12 16:15:02 1998
AC Power Fails! UPS provides power! - Wed Jan 14 18:29:19 1998
System will be shut down in 5 Minutes! - Wed Jan 14 18:29:52 1998
AC Power recovered! - Wed Jan 14 18:29:54 1998
Shutdown Stops! System Returns to Normal State! - Wed Jan 14 18:29:54 1998
```

## 5.8. Files List and CD Contents

Operating System	File Name
Linux	linux.Z
FreeBSD 2.X	bsd-2.Z
FreeBSD 3.X	bsd-3.Z

## 5.9. Instruction to mount CD-ROM

Operating System	command	Parameters	device name	directory
Linux	mount	-t iso9660	/dev/hdd	/mnt/cdrom
FreeBSD	mount	-t cd9660	/dev/acd0c	/mnt/cdrom

## 5.10. System Parameters

Operating System	COM Port	Shutdown Command	Start up file
Linux	/dev/ttyS1	/sbin/halt	/etc/rc.d/rc.local
FreeBSD	/dev/ttyd1	Shutdown -h now	/etc/rc

## 5.11. UPSilon FAQ

**Q1** UPSilon works fine when manually activated but an error message "UPS adapter no response!" appears when the system activates it at start-up.

Answer:

Make sure no other process uses the same serial port as UPSilon daemon.

**Q2.** I tried running the UPSilon on FreeBSD Unix system, but it doesn't work, why?

Answer:

UPSilon uses Unix IPC (Inter Process Communication) functions. FreeBSD does support System V IPC primitives, but you must install this option first. Add the following lines to your kernel config to enable Inter Process Communication.

```
options SYSVSHM
options "SHMMAXPGS=64" # 256Kb of sharable memory
options SYSVSEM      # enable for semaphores
options SYSVMSG      # enable for messaging
```

Recompile and install.

Please refer to **FreeBSD WebSite** for detailed information about these subject.